


43

SN 11119 MODEL 2400 C MODIFIED TERR. 8 8/89

Feedall
automation

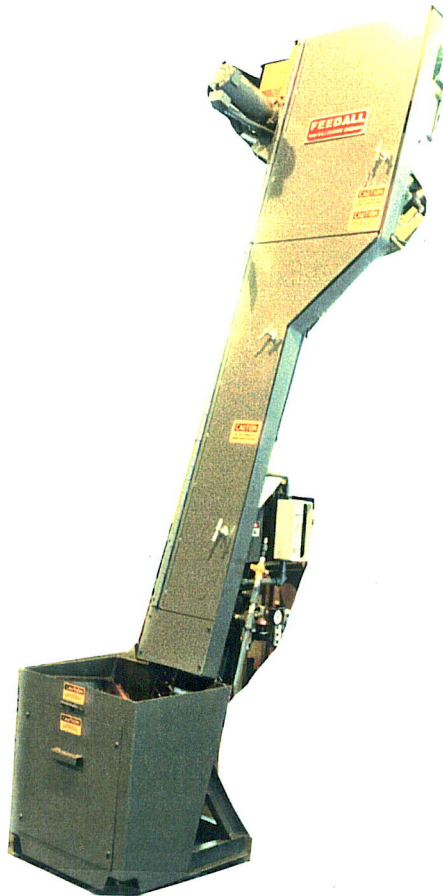

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER
TAPERED BEARING ROLLERS .200 TO .625" DIA. X .370 TO .875"
LG. THE ROLLERS WILL BE FED END TO END IN A SINGLE
CONTINUOUS STREAM TO A POINT 84" ABOVE THE FLOOR TO
A CENTERLESS GRINDER ORIENTER (BY CUSTOMER) AT A
RATE OF 350 TO 750 PARTS PER. MIN. 4" WIDE ELEVATOR
BELT, 1 1/2 CU. FT. HOPPER
DWG. P 7745