


Feedall

automation

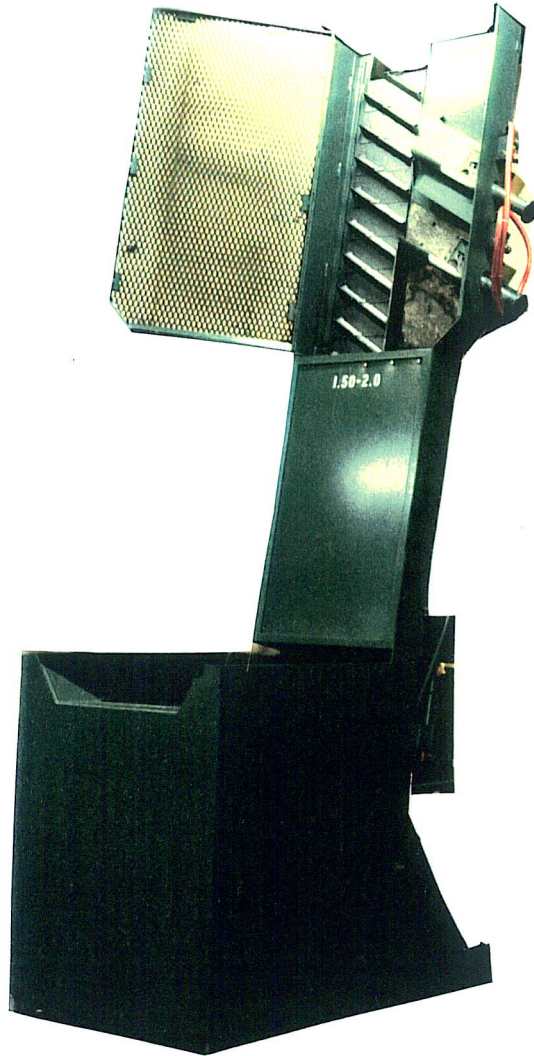

FEED FROM SIX RANDOM LOADED FLOOR MOUNTED HOPPERS, CONDUIT COUPLINGS, 1/2, 3/4, 1, 1 1/4, 1 1/2 AND 2" PIPE SIZE. ELEVATE THEN ORIENT END TO END IN TO TWO INDIVIDUAL VERTICAL CHUTES TO A HIEGHT OF 52" ABOVE THE FLOOR AT A RATE OF 420 TO 660 PER. HOUR FOR SIZES 1/2 TO 1" AND 220 TO 320 PER. HOUR FOR SIZES 1 1/4 TO 2". NOTE: THE 2400C FEEDERS FED THE SMALLER RANGE AND THE 2500C THE LARGER. THE FEEDERS WERE EQUIPPED WITH DUAL ON DEMAND TUBE TOOLING, THESE MACHINES WERE FEEDING AUTO TAPPERS

2400C 6" WIDE ELEVATOR BELT, 12 CU. FT. HOPPER
 2500C 12" WIDE ELEVATOR BELT, 12 CU. FT. HOPPER
 DWG. P 6248 R 2400C DWG. P 6251 R 2500C