


FEEDALL Model 2600-D Elevating Hopper Feeder

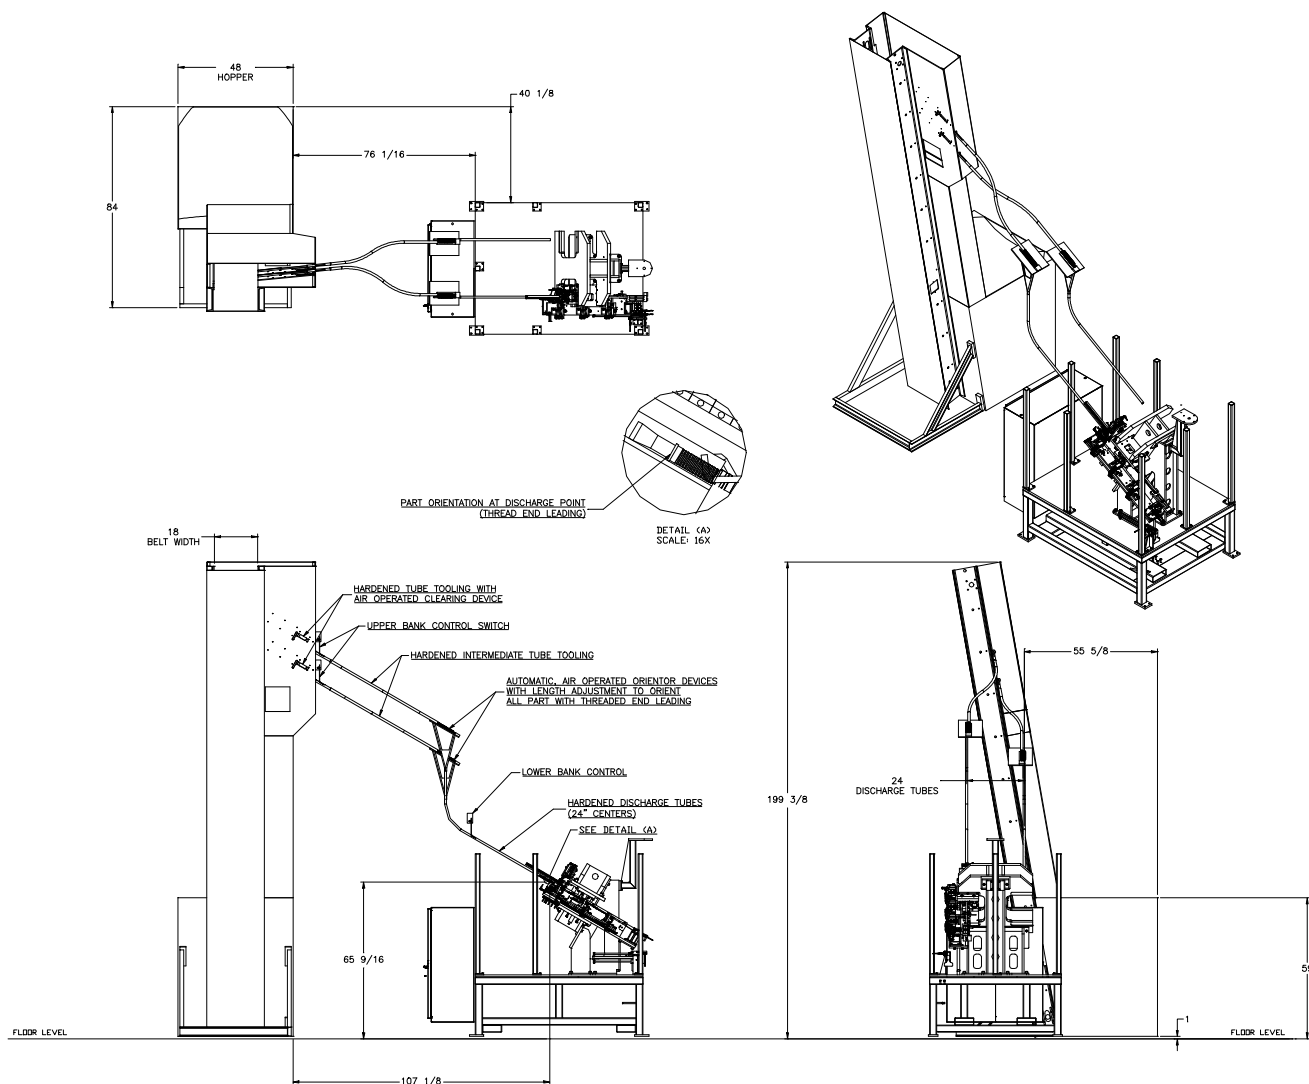

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The Studs will be elevated from the hopper via a cleated belt and discharged into two streams threaded end leading on a 30° angle.
- BELT WIDTH:** 18" Wide Elevating Belt
- DRIVE:** 1 HP/AC Motor
- PARTS FED (SIZE):** Threaded Studs (0.50"Ø x 2.75"-8.50" Lg.)
- FEED RATE:** 30 Parts/Chute (60 Parts/Minute Total)
- MACHINE FED:** Inspection Equipment