


FEEDALL Model 1500 Bi-Directional Orienting Conveyor w/6,000# Vibratory Metering Hopper & Tub Stand

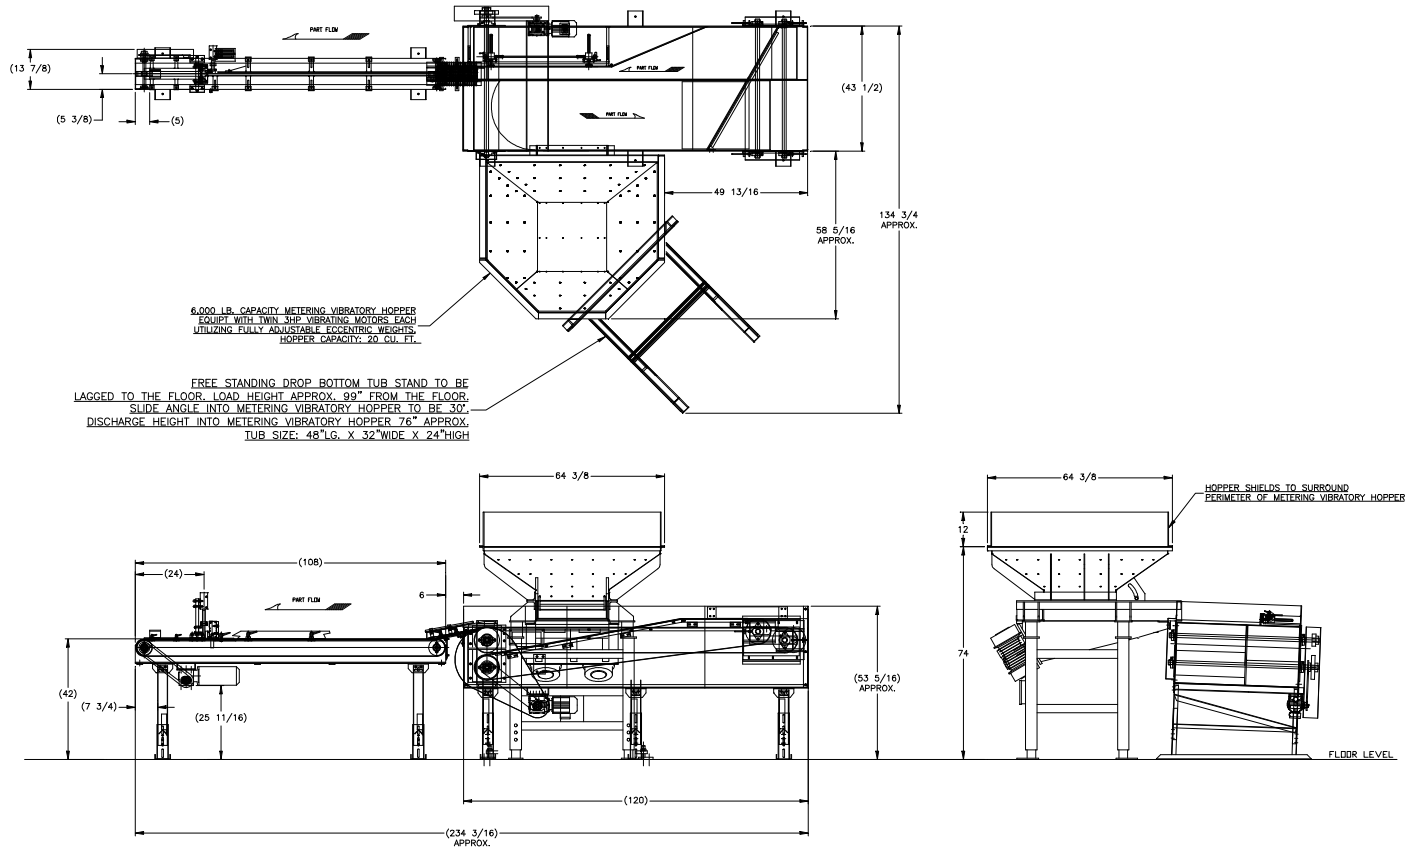

- APPLICATION:** Feed parts from a drop bottom tub stand. The parts will be spilled randomly onto a bi-directional feed conveyor. The parts will merge from the in-feed conveyor portion onto the discharge conveyor. The parts will be escaped one at a time onto a customer supplied pick-n-place unit.
- BELT WIDTH:** 24" Return Lane and 18" Orienting Lane
- DRIVE:** 1-1/2 HP/AC Motor
- PARTS FED (SIZE):** Pipe Fitting Forgings
- FEED RATE:** 15 Parts/Minute
- MACHINE FED:** Robot Loaded Machining Center