


FEEDALL Model 0600 Elevating Bulk Hopper Feeder

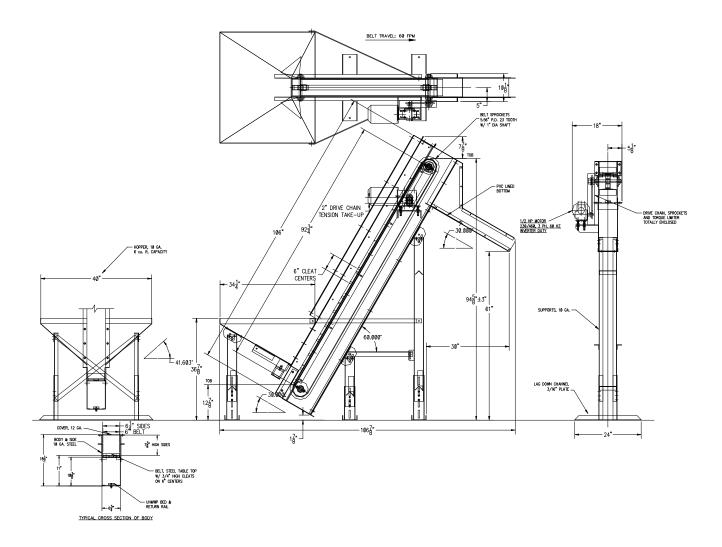

APPLICATION: Feed from a random loaded floor mounted hopper. Parts will be elevated from hopper via a

cleated belt and discharged randomly into a customer supplied vibratory bowl.

BELT WIDTH: 6" Wide Table-Top Chain Elevating Belt

DRIVE: 1/2 HP/AC Motor

PARTS FED (SIZE): Forged Brass Pipe Fittings (Part Matrix)

FEED RATE: 15 Parts/Minute **MACHINE FED:** Vibratory Bowl