


FEEDALL Model 1650-1PB-168 Intermediate Conveyor

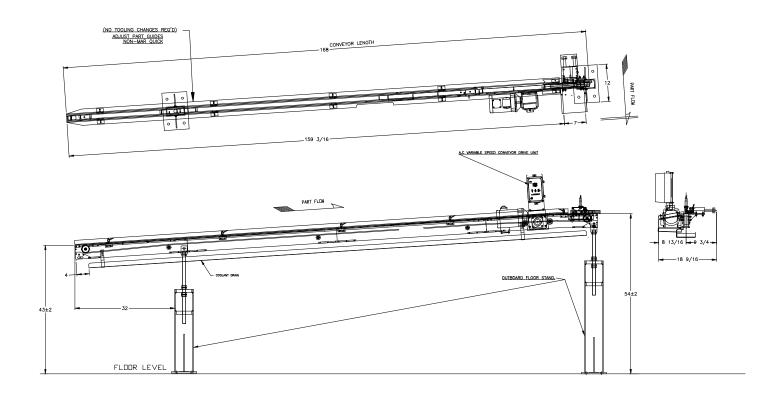

APPLICATION: Convey Steel Bushings from Acme Centerless Wire Brush to End Finisher.

BELT WIDTH: 1" Wide Polyurethane Timing Belt

DRIVE: 1/2 HP/AC Motor w/Variable Frequency Controller **PARTS FED (SIZE):** Steel Bushings (1.375"-2.50"Ø x 2.50"-4.50" Lg.)

FEED RATE: 1-50 Feet/Minute **MACHINE FED:** End Finisher