
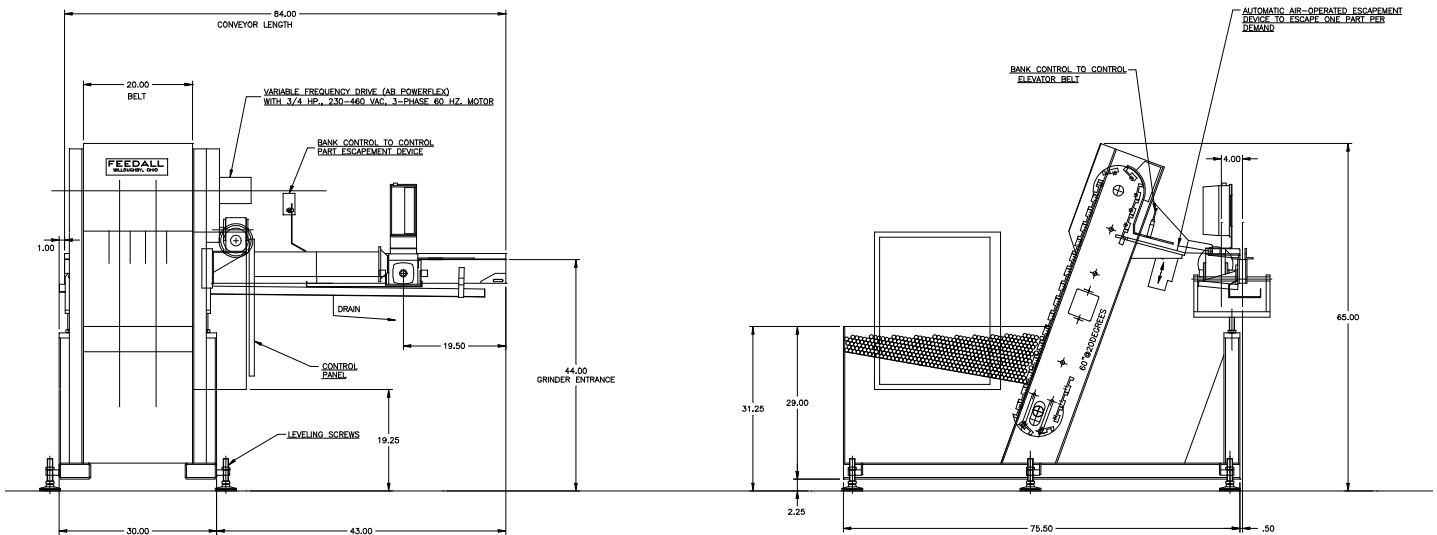


FEEDALL Model 2220 Elevating Hopper Feeder w/1650-1SC-84 Cross-Feed Conveyor

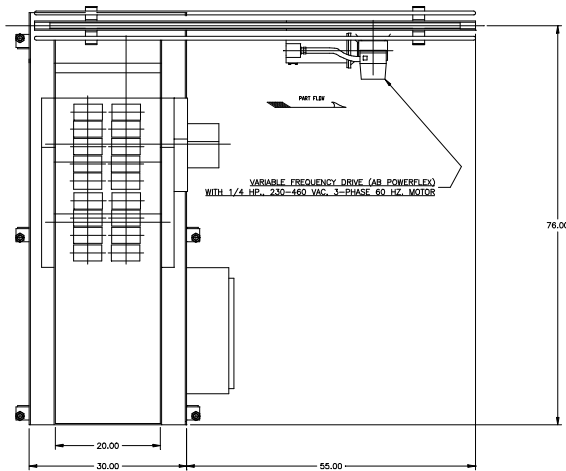

- APPLICATION:** Feed from a random loaded, floor mounted hopper, Agitator Shafts. The Shafts will be elevated from the hopper via a cleated belt and deposited onto a rear mounted accumulation ramp. An air operated escapement device will load one part at a time onto a Cross-Feed Conveyor, which will translate the parts in a continuous, end-to-end stream to the workrest of a Centerless Grinder.
- BELT WIDTH:** 20" Wide Elevating Belt
- ELEVATOR DRIVE:** 1/3 HP/AC Motor w/Variable Frequency Controller and Overload Relief Clutch
- CONVEYOR DRIVE:** 1/4 HP/AC Motor w/Variable Frequency Controller
- PARTS FED (SIZE):** Agitator Shafts (0.75"Ø x 9.88"-16.22" Lg.)
- FEED RATE:** 12-14 Parts/Minute
- MACHINE FED:** CINCINNATI Model 340-20 DE Centerless Grinder