


FEEDALL Model 2224 Elevating Hopper Feeder

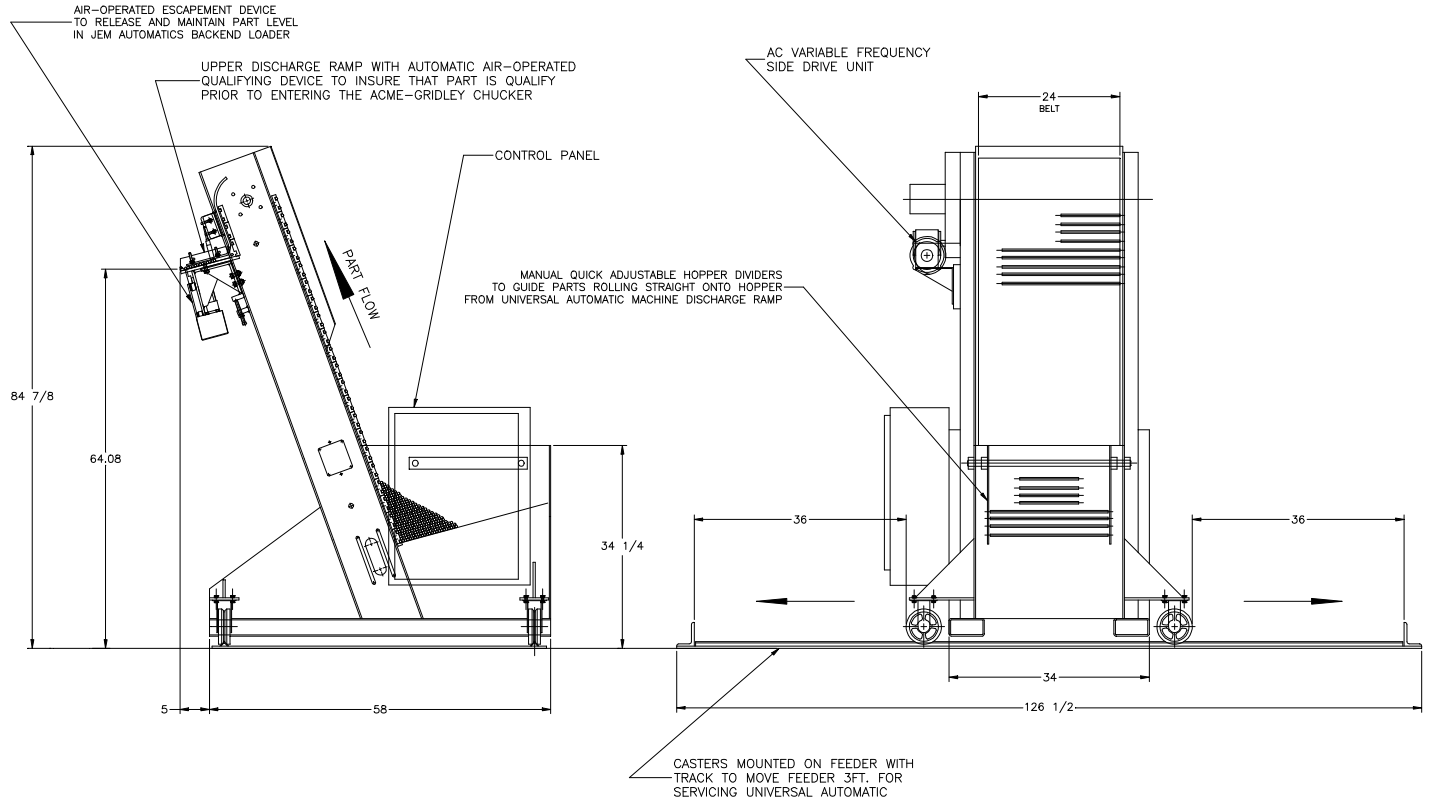

- APPLICATION:** Feed from an automatic or hand loaded, floor-mounted hopper. Sheared Steel Rods will be elevated out of the hopper and discharged rolling, diameter-to-diameter into a load hopper on a Acme-Gridley Chucker at 63.34" above the floor at 15 parts/minute.
- BELT WIDTH:** 24" Wide Elevating Belt
- DRIVE:** 1/2 HP/AC Motor
- PARTS FED (SIZE):** Sheared Steel Bars (0.315"-0.425"Ø x 10.00"-20.00" Lg.)
- FEED RATE:** 15 Parts/Minute
- MACHINE FED:** ACME-GRIDLEY Multi-Spindle Chucker