
## FEEDALL Model 2224 Elevating Hopper Feeder

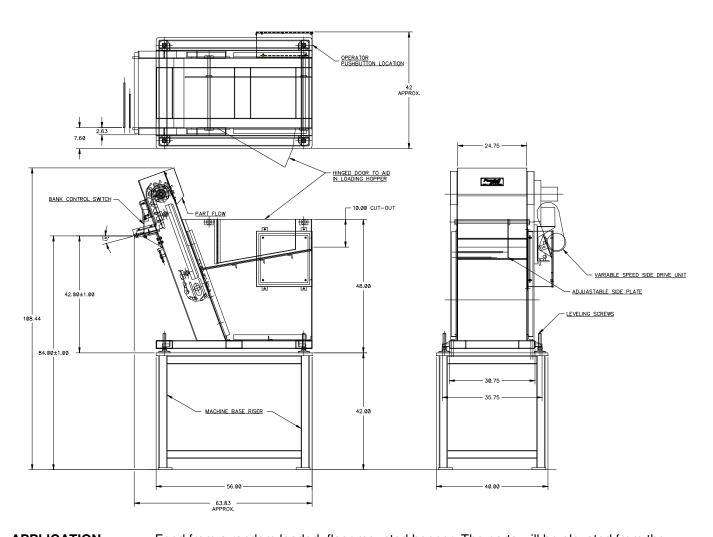

**APPLICATION:** Feed from a random loaded, floor mounted hopper. The parts will be elevated from the

hopper via a cleated belt and deposited onto a rear mounted accumulation ramp.

**BELT WIDTH:** 24" Wide Elevating Belt

**DRIVE:** 3/4 HP/AC Motor

**PARTS FED (SIZE):** Sheared Steel Bars (0.465"-0.585"Ø x 12.00"-16.00" Lg.)

**FEED RATE**: 90-100 Parts/Minute **MACHINE FED**: VIDEX U-Bolt Maker