


FEEDALL Model 2233 Elevating Hopper Feeder

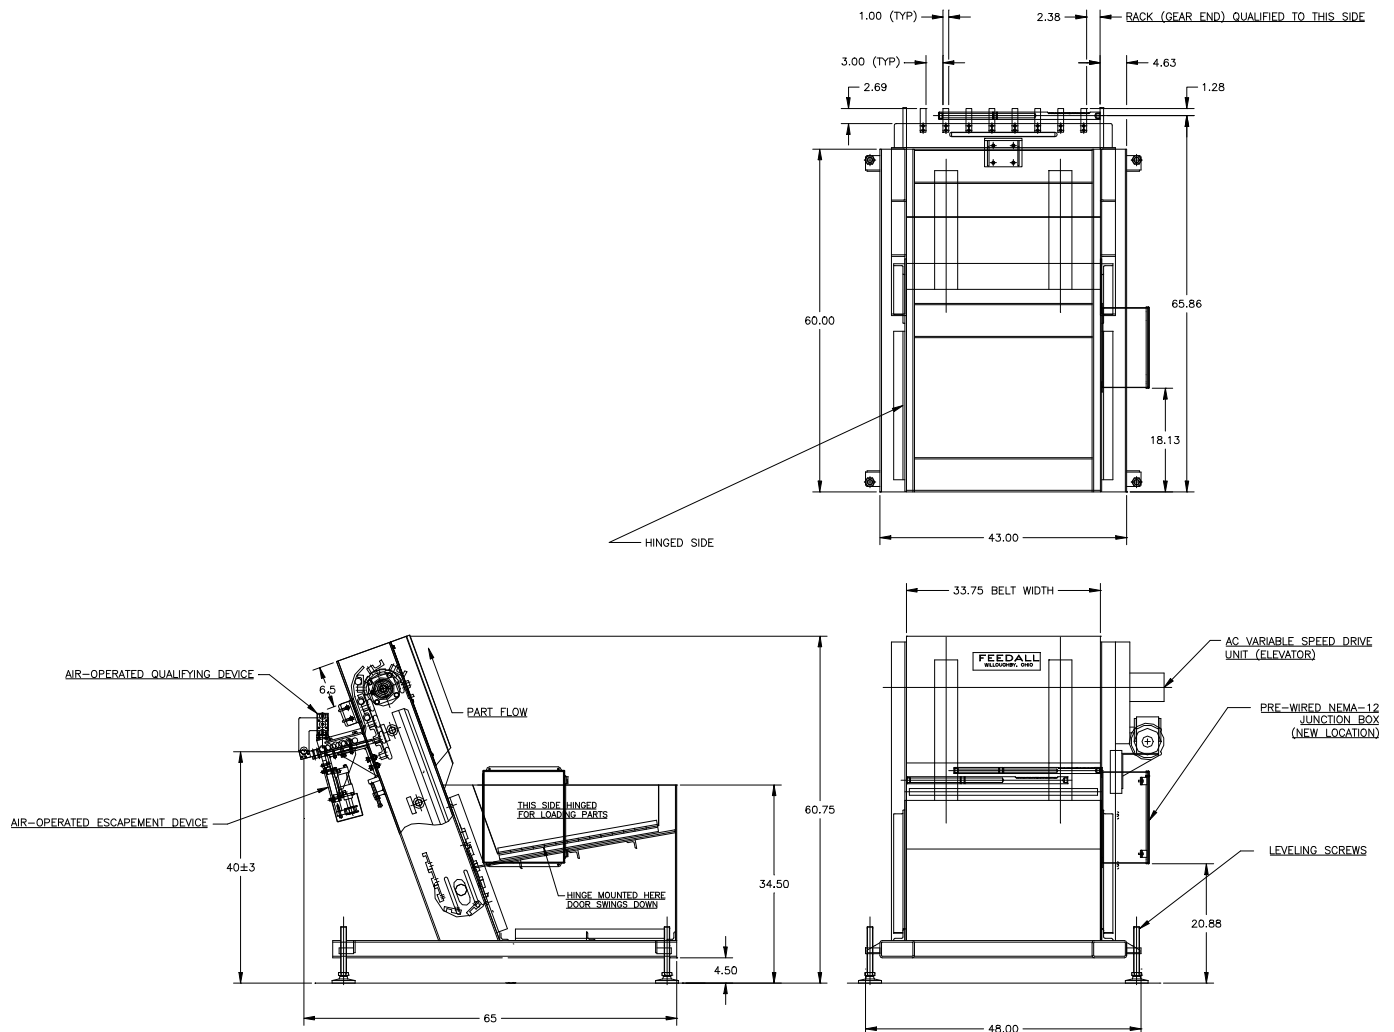

APPLICATION: Feed from a random loaded, floor mounted hopper. The Steering Racks will be elevated from the hopper via a cleated belt and discharged onto an accumulation chute. An air operated escapement device will load one part at a time onto a v-nest for customer pick off via lift and carry transfer.

BELT WIDTH: 33" Wide Elevating Belt

DRIVE: 3/4 HP/AC Motor

PARTS FED (SIZE): Steering Racks (0.98"-1.26"Ø x 23.68"-29.79" Lg.)

FEED RATE: 3 Parts/Minute

MACHINE FED: KOKUSAI Straightener