


55

SN 10658 MODEL 2400C TERR. 8 2/88

Feedall
automation

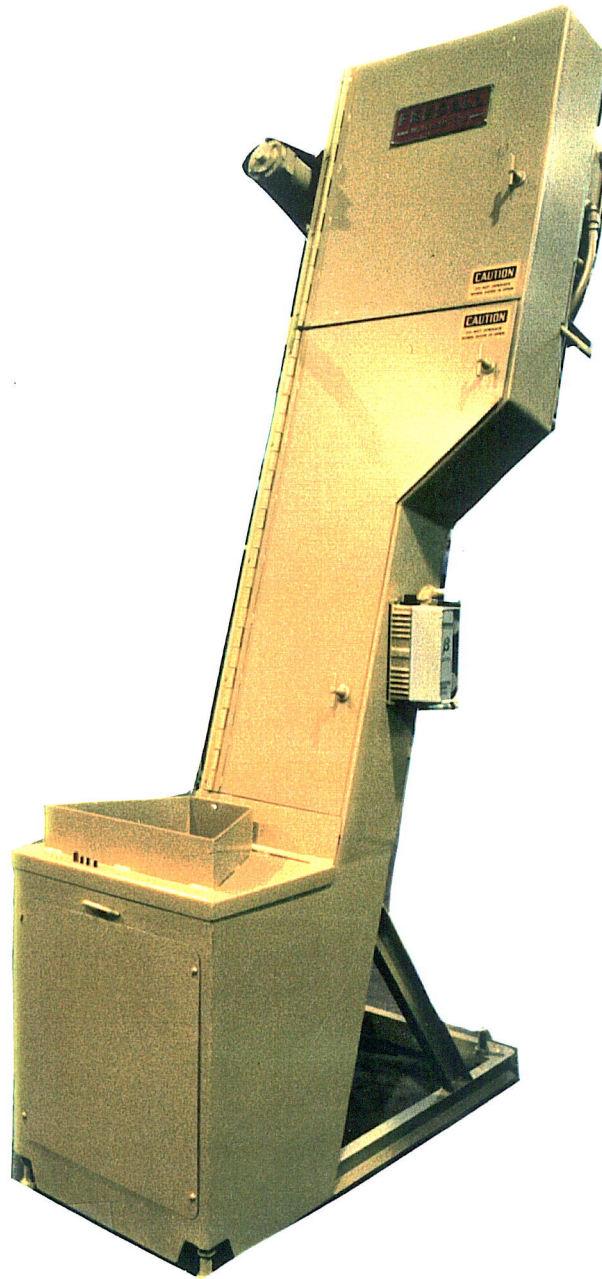

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,
TAPERED BEARING ROLLERS, .200 TO .625" DIA. THE ROLLERS
ARE TO BE ORIENTED END TO END IN A SINGLE END TO END
STREAM TO A POINT 76" ABOVE THE FLOOR AT A RATE OF
350 TO 700 PER. MIN. TO A CENTERLESS GRINDER.
4" WIDE ELEVATOR BELT, 3 CU. FT. HOPPER.
DWG. P 7409 R 3