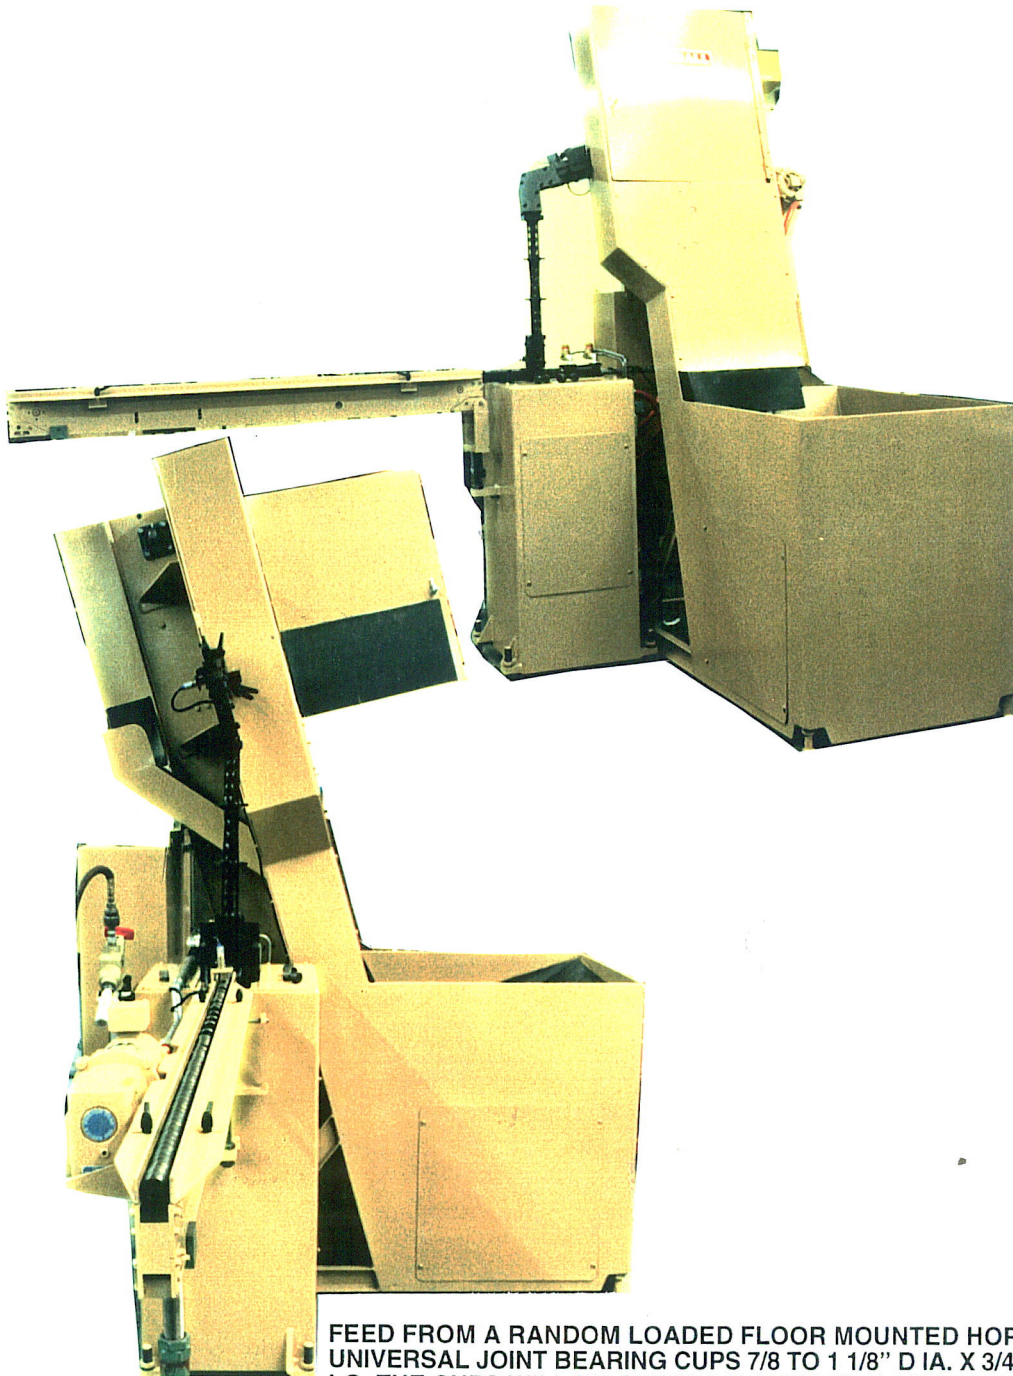


Feedall
automation

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER, UNIVERSAL JOINT BEARING CUPS 7/8 TO 1 1/8" D IA. X 3/4 TO 1" LG. THE CUPS WILL BE ORIENTED OPEN SIDE OUT ROLLING DIA. TO DIA. TO A VERTICAL 90 DEGREE TWISTED CHUTE TO A PNEUMATIC PUSHER DEVICE ADVANCING ONE CUP AT A TIME TO AN IN PUT CONVEYOR, CONVEYING THE CUPS CLOSED END LOADING IN A CONTINUOUS STREAM TO A CENTERLESS GRINDER AT 42 3/4 ABOVE THE FLOOR AT A RATE OF 1500 TO 2000 PER. HOUR.
6" WIDE ELEVATOR, 6 CU. FT. HOPPER .
DWG. PD 8092