


64

SN 10127 MODEL 2400 D TERR. 8 6/86

Feedall
automation

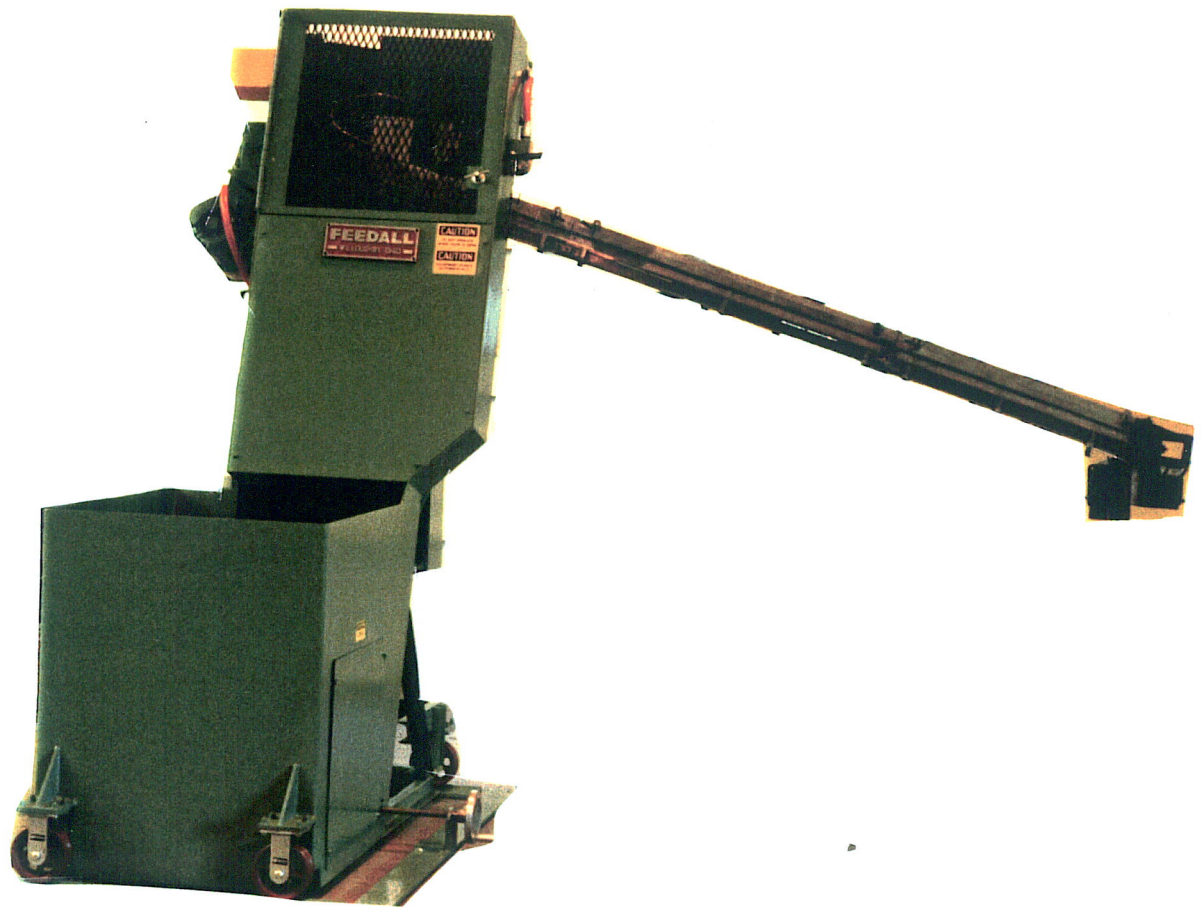

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER
VALVE SEAT INSERTS 15/16 TO 2 1/4" DIA. X 3/16 TO 3/8" THICK.
THE INSERTS WILL BE ORIENTED ROLLING DIAMETER TO
DIAMETER THEN FED TO FEED ROLLS ON A CENTERLESS
GRINDER AT 42 3/4" ABOVE THE FLOOR, AT A RATE OF 3000
TO 4000 PER. HOUR.
7 1/2" WIDE ELEVATOR BELT, 6 CU. FT. HOPPER.
DWG. P 6852