
6 1 SN 10346 MODEL 2400 D TERR. 2 3/87



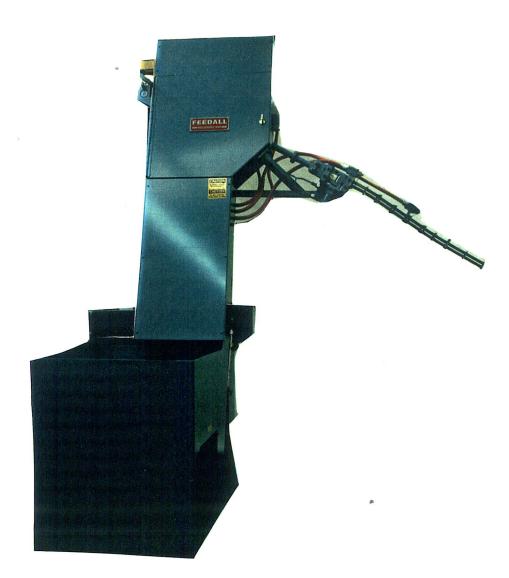

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER, PISTON PINS. THE PINS WILL BE ORIENTED END TO END THEN FED TO AN ESCAPEMENT THEN ESCAPED ONE AT A TIME COUNTED AND FED TO A POINT 65" ABOVE THE FLOOR AT A RATE OF 25 TO 35 PER. MIN.

7 1/2" WIDE ELEVATOR BELT, 12 CU. FT. HOPPER. DWG. PD 7055