


35

SN 10618 MODEL 2400 D TERR. 2 & 8 5/88

Feedall
automation

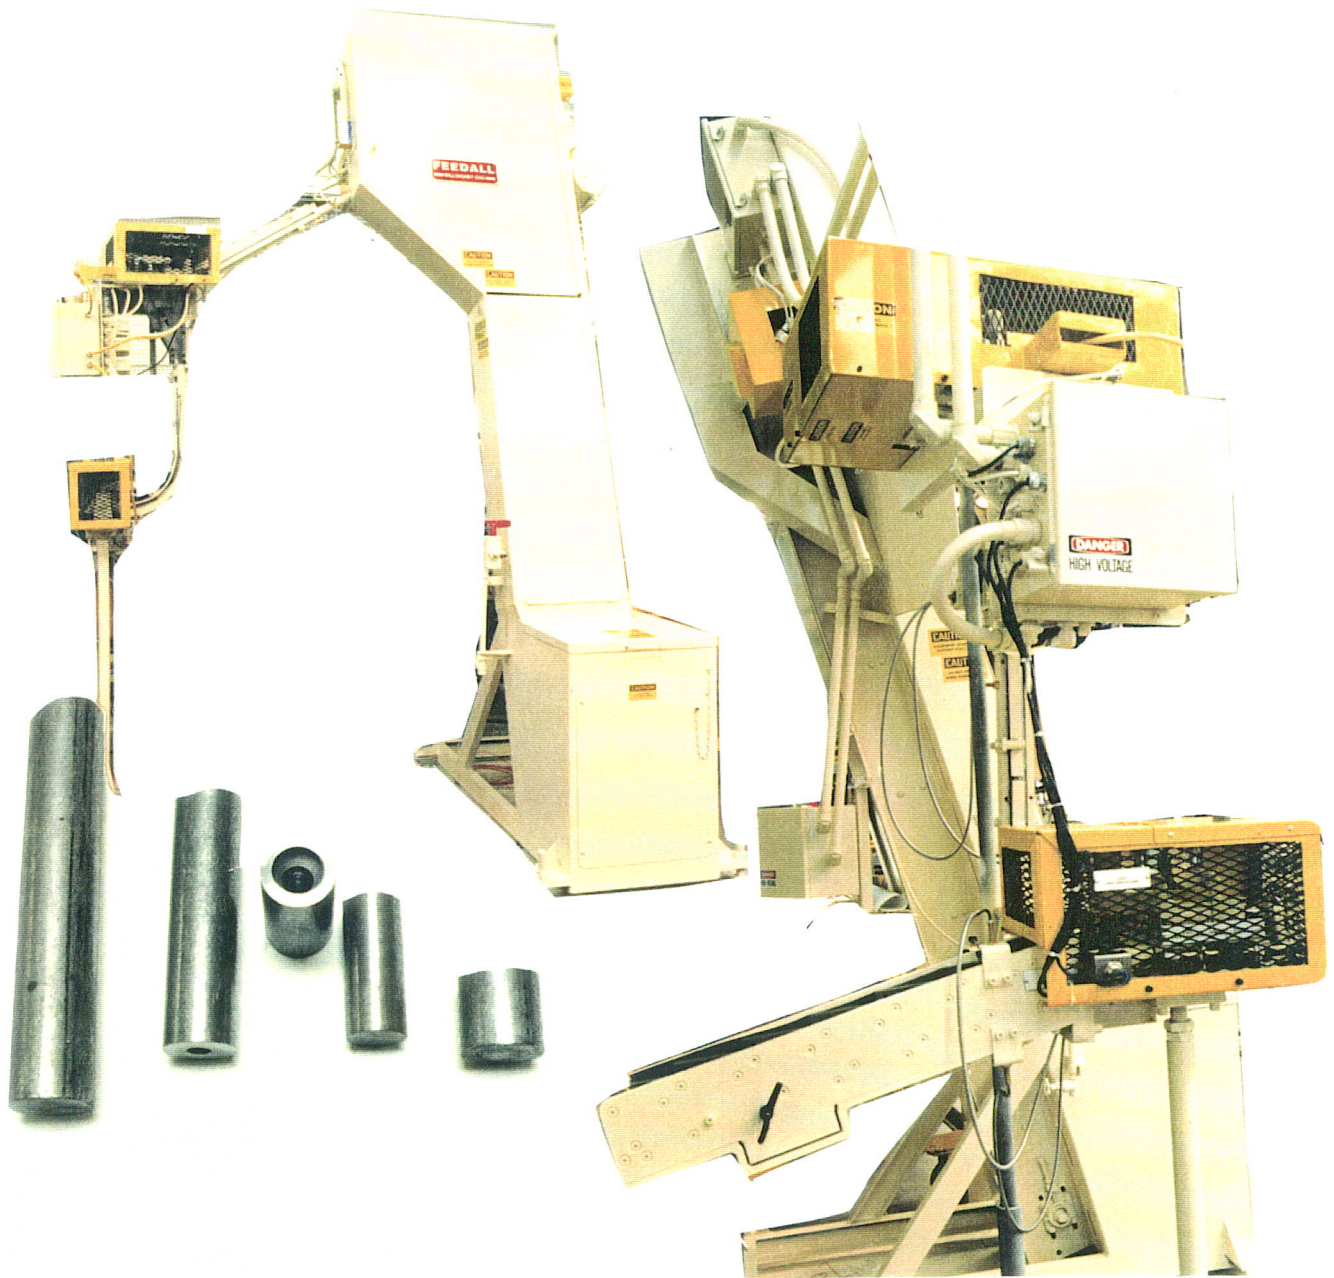

FEEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,
STRUT TUBE ADAPTERS .709 TO .985 "DIA. X 1.00 TO 6.00 "LG.
THE PARTS WILL BE ELEVATED FROM THE HOPPER THEN
ORIENTED END TO END, THEN FED TO AS ORIENTER AND
ORIENTED WITH THE COUNTER BORE AND INTERNAL
CHAMFERED END FACING ABOVE THE FLOOR AT A RATE OF
400 TO 500 PER HOUR.
7 1/2 " WIDE ELEVATOR, 3 CU. FT. HOPPER/
DWG. P 7388 R 4