


71

SN 10966 MODEL 2400 D TERR. 1/89

Feedall
automation

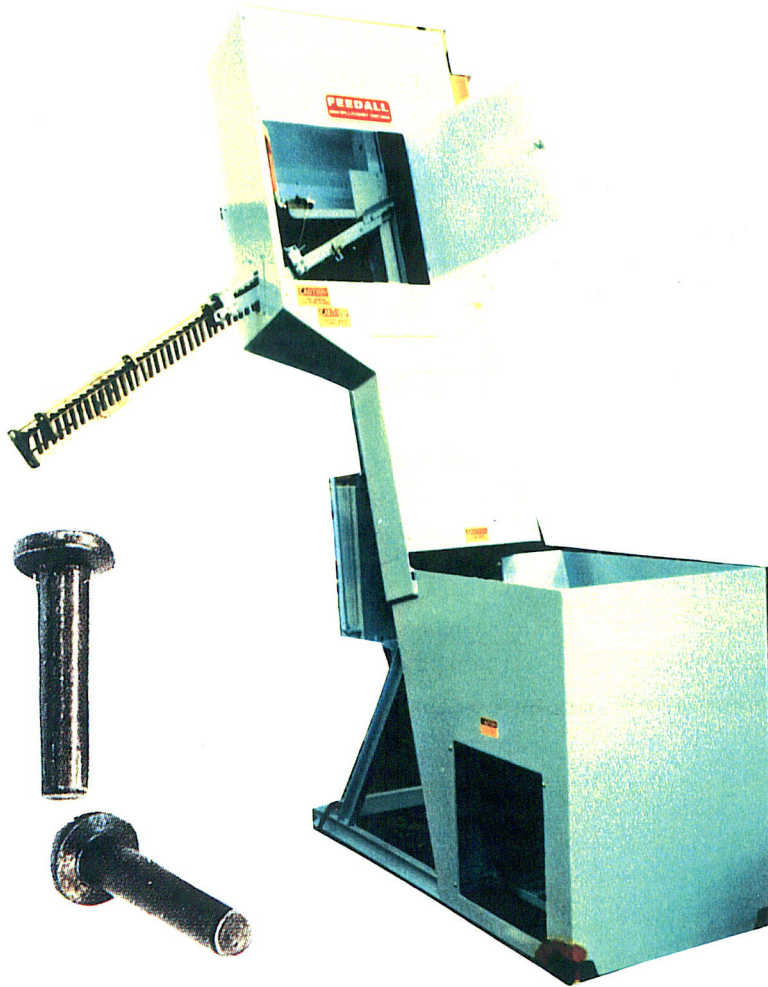

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,
DIESEL ENGINE VALVE LIFTERS. THE LIFTERS WILL BE
ORIENTED HANGING FROM THE HEAD AND FED TO A
POSITION 65" ABOVE THE FLOOR AT A RATE OF 300 TO 400
PER. HOUR TO A CENTERLESS GRINDER.
7 1/2" WIDE ELEVATOR BELT, 10 CU. FT. HOPPER
DWG. P7548