


67

SN 11918 MODEL 2400 D TERR. 4 7/92

Feedall
automation

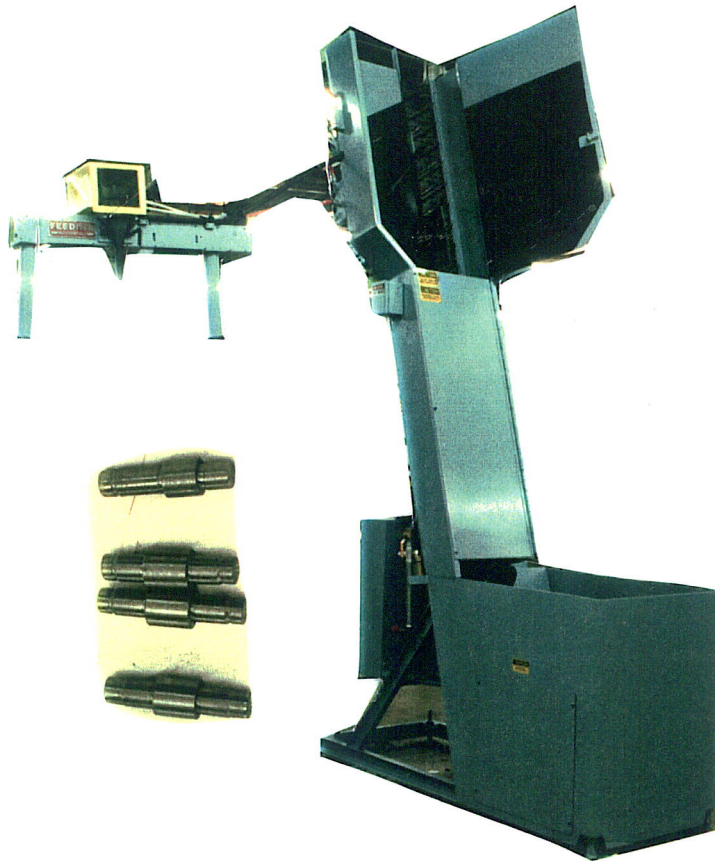

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER, PINION SHAFTS OF VARIOUS SIZES, THE SHAFTS WILL FIRST BE ORIENTED END TO END THEN FED TO A CONVEYOR THEN ORIENTED LONG END OF EACH SHAFT DOWN TO A VERTICAL CHUTE AT 88" ABOVE THE FLOOR AT A RATE OF 600 PER. HOUR.

7 1/2" WIDE ELEVATOR BELT, 6 CU. FT. HOPPER.

DWG. P 8232 R 2