


20

SN 12561 MODEL 2400 D TERR. #1 6/94

**Feedall**  
automation

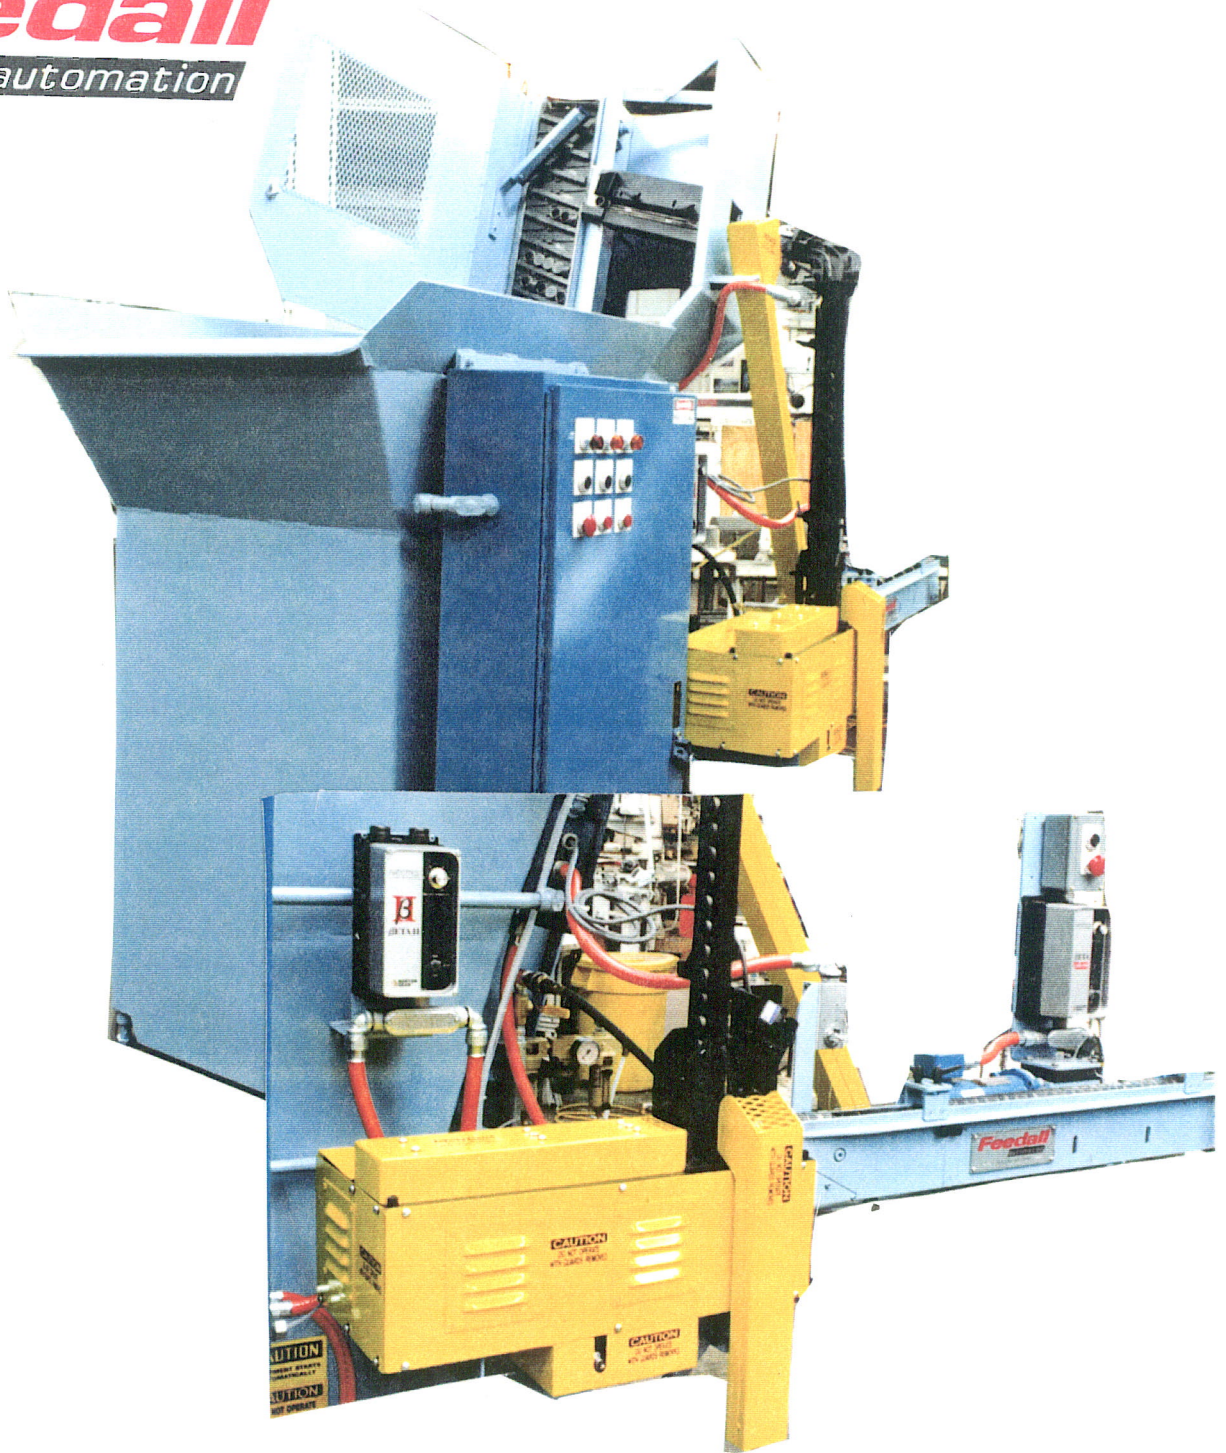

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,  
BEARING CUPS .944 TO 1.387 "DIA. X .610 TO 1.162" LG. THE  
CUPS ARE TO BE ORIENTED OPEN SIDE OUT ROLLING  
DIAMETER TO DIAMETER TO A VARIABLE SPEED PUSHER  
THEN FED END TO END OVER AN INPUT CONVEYER TO THE  
WORK REST OF A CENTERLESS GRINDER AT 42" ABOVE THE  
FLOOR AT A RATE OF 60" PER. MIN.  
7 1/2 "WIDE ELEVATOR BELT, 16CU. FT. HOPPER  
DWG. P 8432 R