


21

SN 12965 MODEL 2400 D TERR# 8 4/95

Feedall
automation

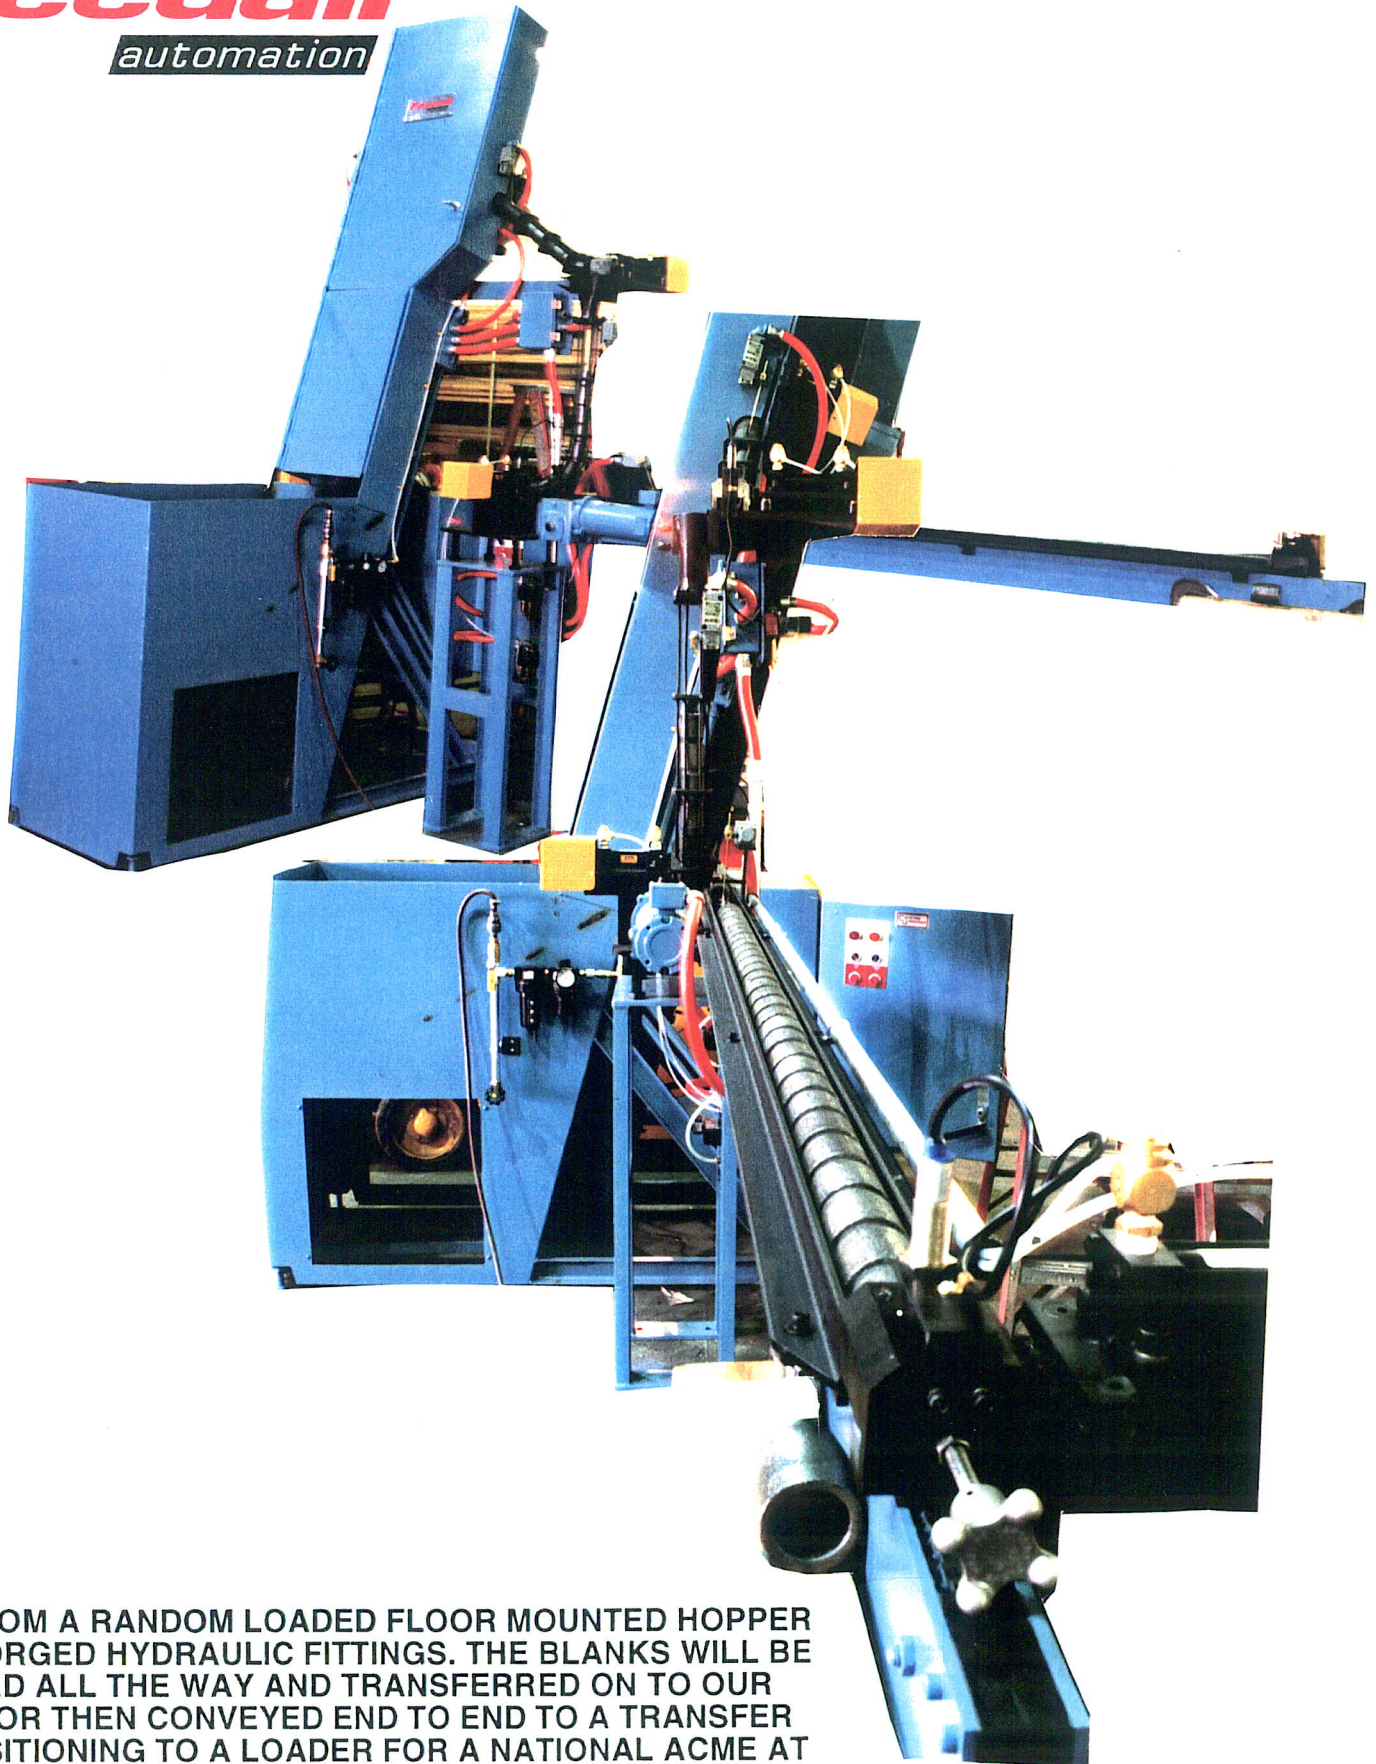

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER
COLD FORGED HYDRAULIC FITTINGS. THE BLANKS WILL BE
ORIENTED ALL THE WAY AND TRANSFERRED ON TO OUR
CONVEYOR THEN CONVEYED END TO END TO A TRANSFER
FOR POSITIONING TO A LOADER FOR A NATIONAL ACME AT
48" ABOVE THE FLOOR AT A FEED RATE OF 3 TO 10 PER. MIN.
7 1/2 "WIDE ELEVATOR BELT, 12 CU. FT. HOPPER
DWG. PD 8886