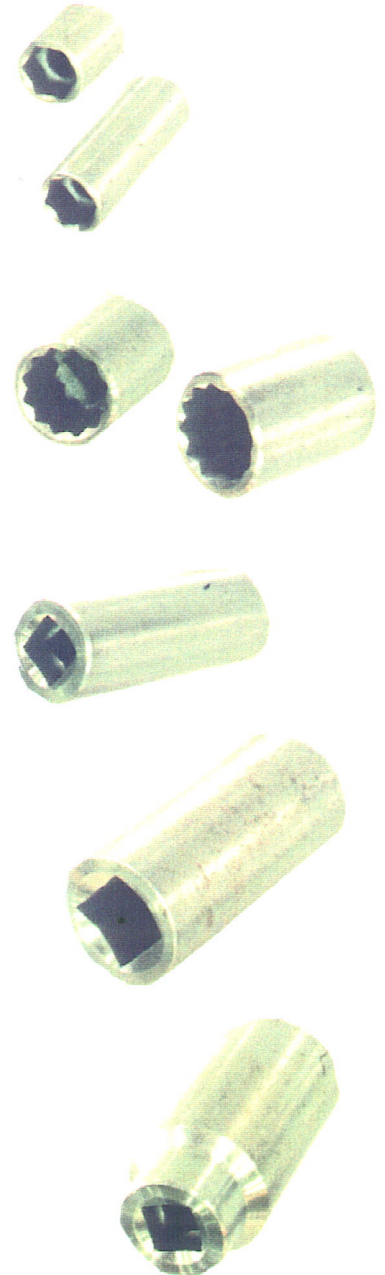
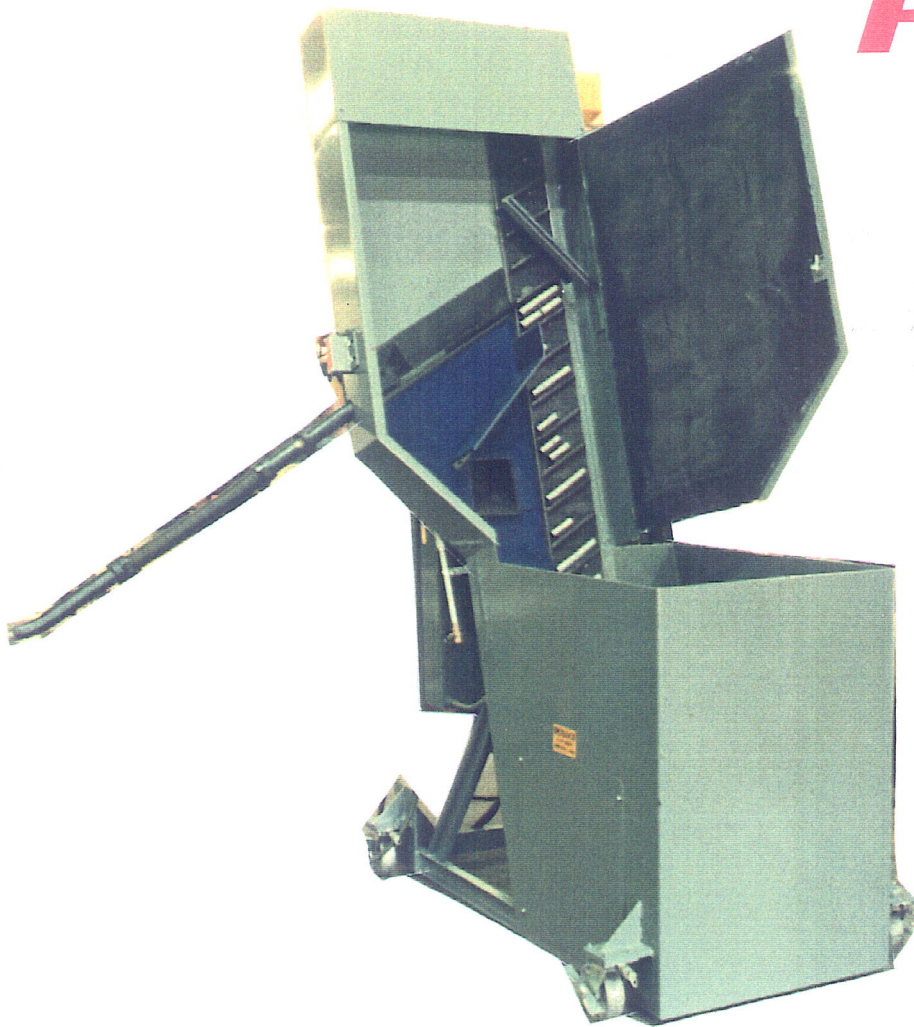


SN 13708 MODEL 2400-D TERR. 8 8/96

Feedall
automation

FEED FROM A RANDOM LOADED FLOOR
HOPPER SOCKET WRENCHES .720" TO
1.440" DIAMETER BY 1.00" TO 3.25" LONG.
THE SOCKETS ARE ELEVATED FROM THE
HOPPER THEN DISCHARGED SLIDING END
TO END IN A CONTINUOUS STREAM TO A
CENTERLESS GRINDER AT 42" ABOVE THE
FLOOR AT A FEED RATE OF 70 TO 200" PER.
MIN. 7 1/2" WIDE ELEVATOR BELT, 10 CUBIC
FOOT HOPPER WITH FLOOR CASTERS.

DWG. P 9305 R 2