

## FEEDALL Model 2400-D Elevating Hopper Feeder



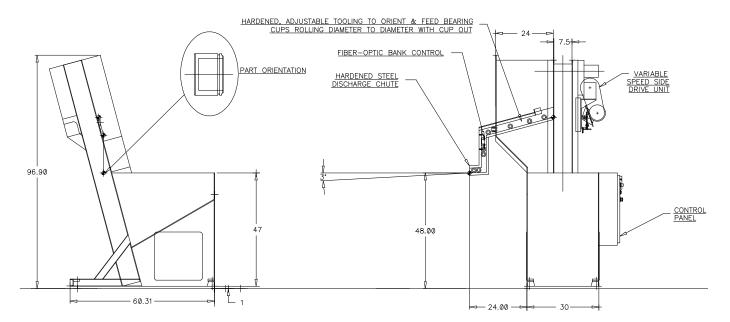

**APPLICATION:** Feed from a random loaded, floor mounted hopper. The Bearing Cups are coated with rust

prohibitant. Cups will be fed oriented, cup out in a rolling, diameter-to-diameter.

**BELT WIDTH:** 7-1/2" Wide Table-Top Chain

**DRIVE:** 1/2 HP/AC Motor

PARTS FED: Universal Joint Bearing Cups

**FEED RATE:** 700 Parts/Hour (≈12 Parts/Minute)

**MACHINE FED:** Assembly Machine