Feedall automation

Reliable Automatic Parts Feeders Designed With Ingenuity

SO #16975

FEEDALL Model 2400-D Elevating Hopper Feeder

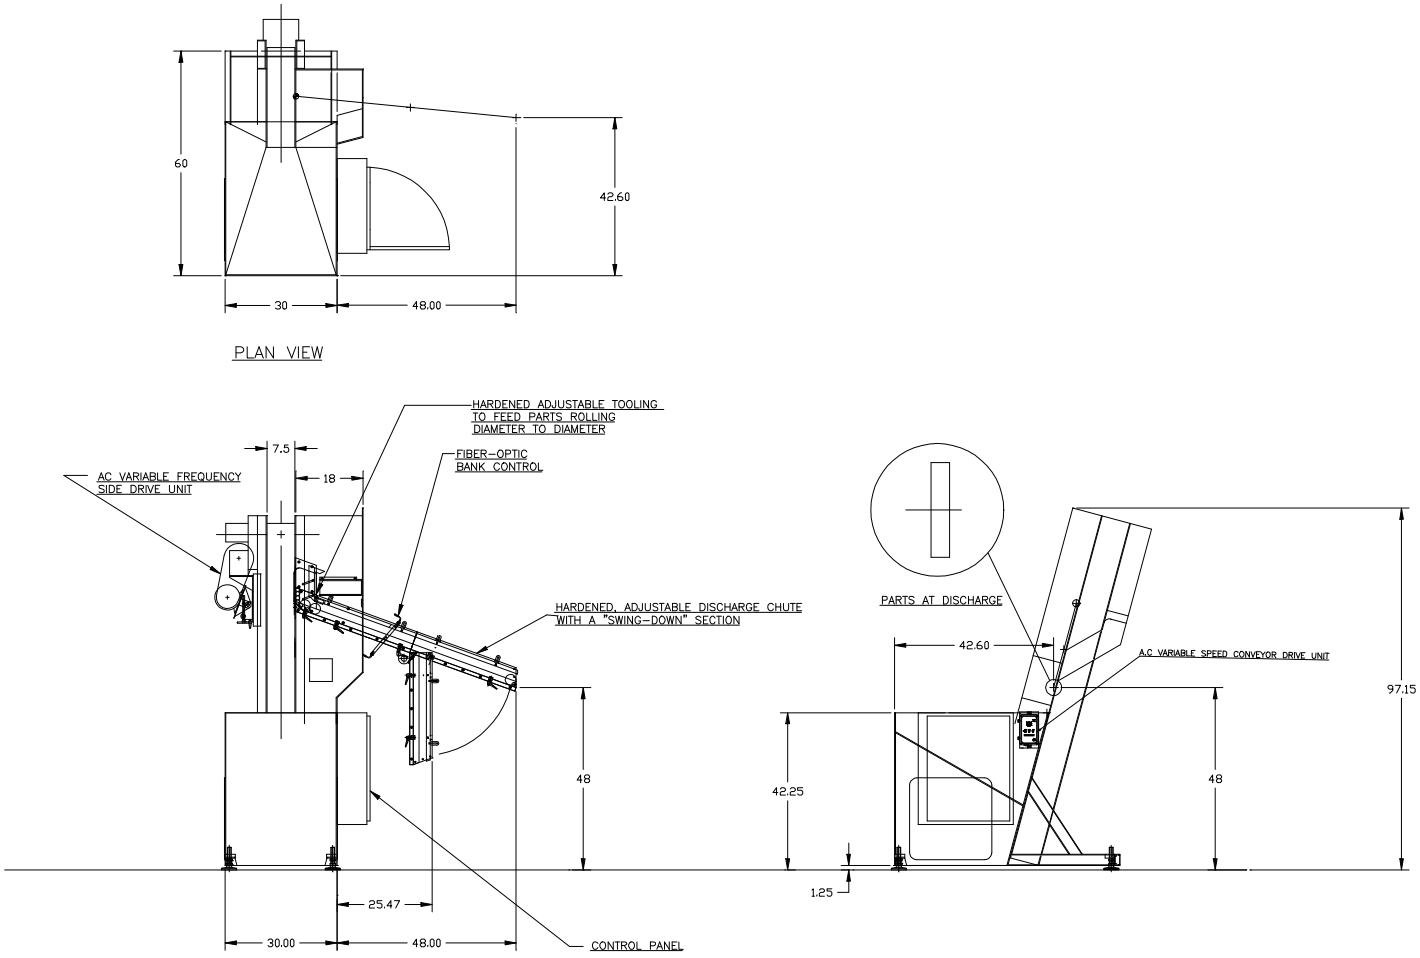

APPLICATION:	Feed from a random loaded, floor mounted hopper. The Valve Seat Inserts will be elevated from the hopper via a cleated belt and discharged in a continuous rolling stream at 20°.
BELT WIDTH:	7-1/2" Wide Table-Top Chain
DRIVE:	3/4 HP/AC Motor
PARTS FED (SIZE):	Valve Seat Inserts (1.161"-2.816"Ø x 0.1524"-0.46" Lg.)
FEED RATE:	58 Parts/Minute
MACHINE FED:	GARDNER SDG-30 Double Disc Grinder

FEEDALL, Inc. • 38379 Pelton Road • Willoughby, OH 44094 • (800) 942-8101 • (440) 942-5710 Fax
www.***feedall***.com