


## FEEDALL Model 2400-D Elevating Bulk Hopper Feeder

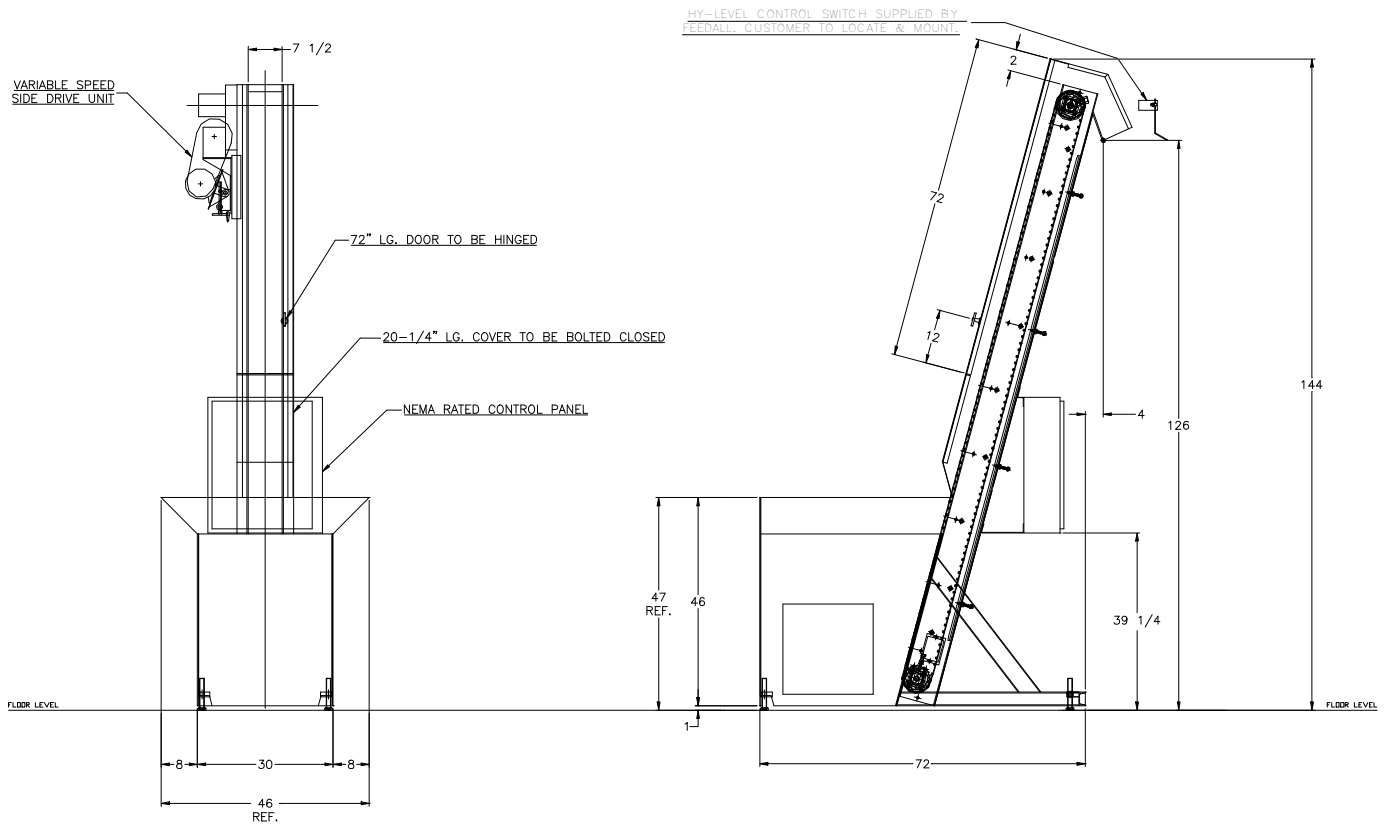

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The parts will be elevated from the hopper via a cleated belt and discharged over the top and out the backside with random orientation.
- BELT WIDTH:** 7-1/2" Wide Table Top Chain
- DRIVE:** 1/2 HP/AC Motor
- PARTS FED (SIZE):** Finished Hex Nuts (.875" to 1.25")
- FEED RATE:** 800 to 1,250 Parts/Minute
- MACHINE FED:**