


FEEDALL Model 2400-D Elevating Hopper Feeder

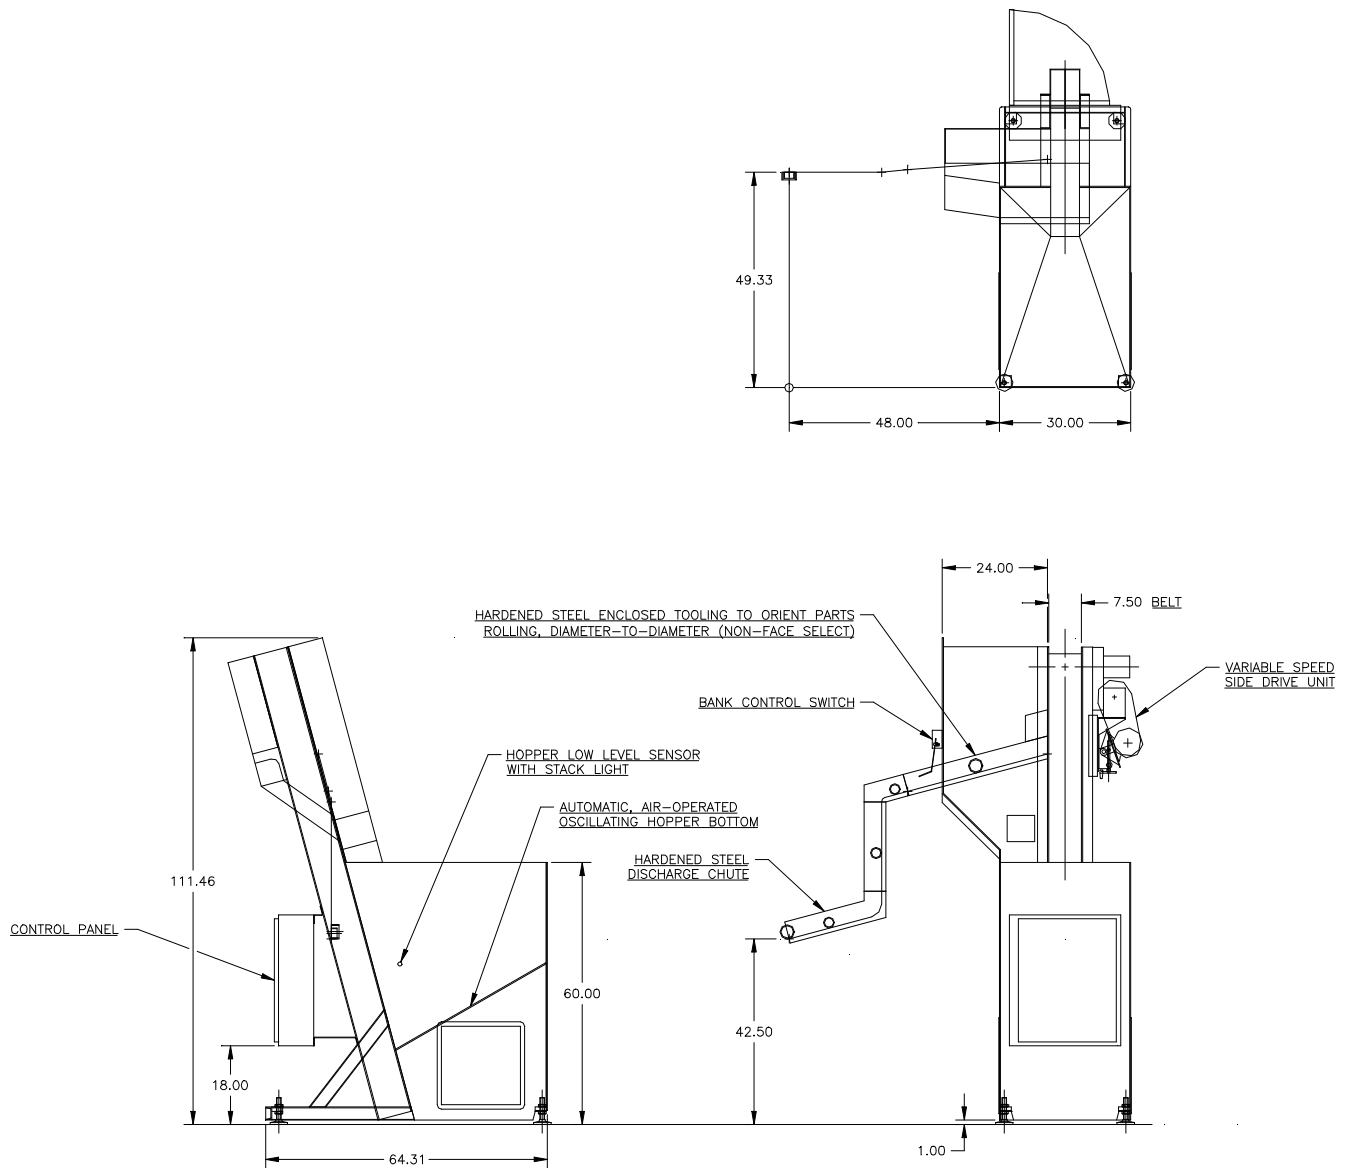

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The parts will be elevated from the hopper via a cleated belt and discharged in a rolling stream.
- BELT WIDTH:** 7-1/2" Wide Table-Top Chain
- DRIVE:** 3/4 HP/AC Motor
- PARTS FED (SIZE):** Constant Velocity Cage Blanks (2.51"-3.31"Ø x 1.33"-1.69" Lg.)
- FEED RATE:** 6 Parts/Minute
- MACHINE FED:** CNC Turning Center