


## FEEDALL Model 2400-D Elevating Hopper Feeder

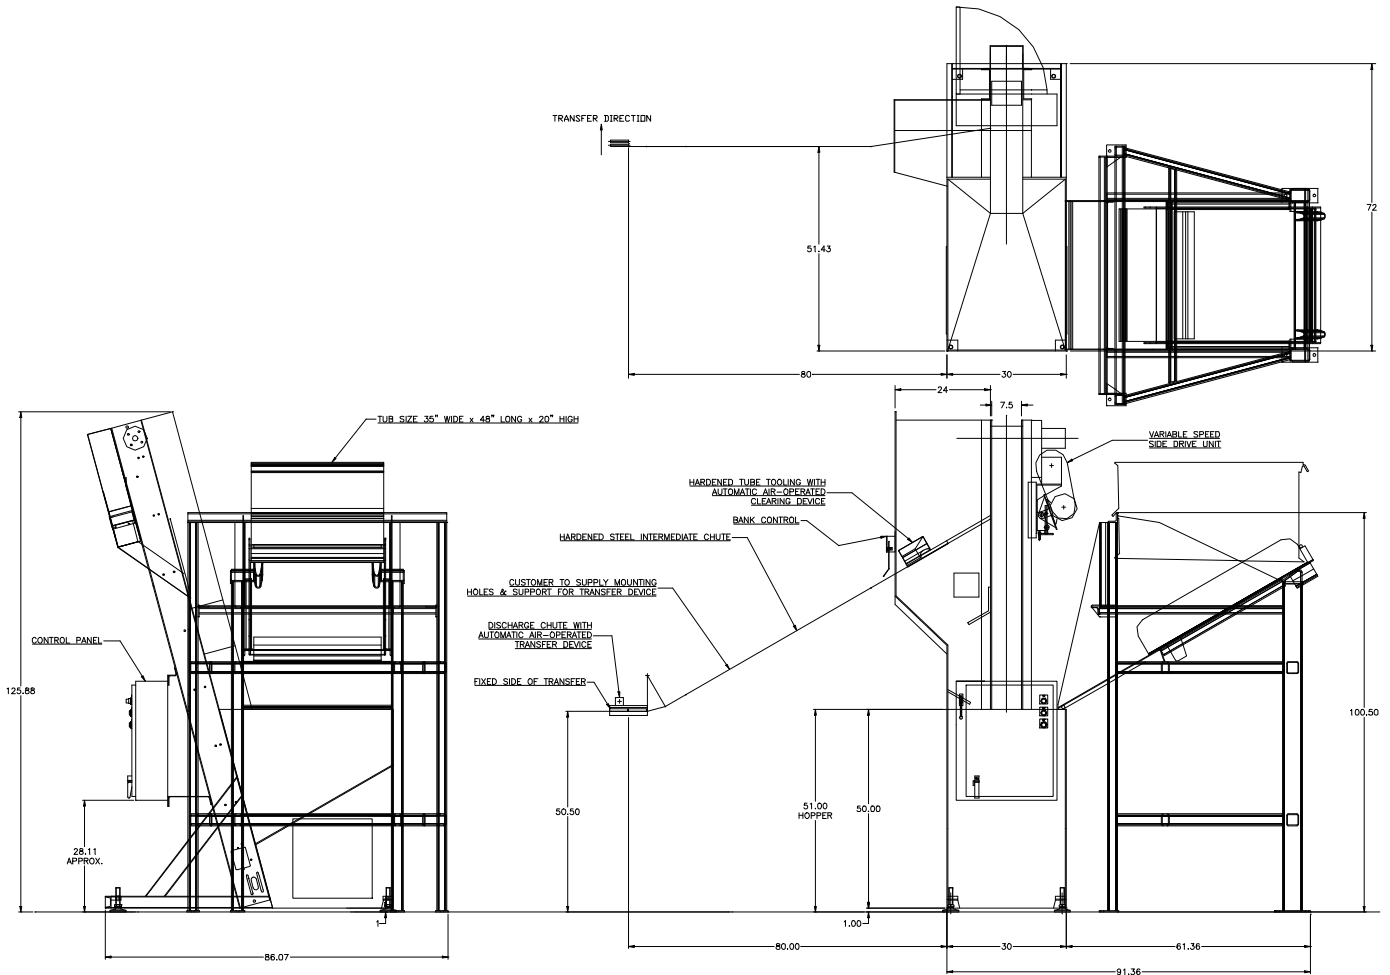

- APPLICATION:** Feed from a random loaded, floor mounted hopper, Input Shaft Blanks. Blanks will be elevated from hopper via a cleated belt and oriented in a continuous, end-to-end stream to an air-operated transfer device. Transfer device will load one part at a time into load chute of a Multi-Spindle Chucker.
- BELT WIDTH:** 7-1/2" Wide Elevating Belt
- DRIVE:** 3/4 HP/AC Motor w/Variable Speed Drive and Overload Relief Clutch
- HOPPER CAPACITY:** 14 cu.ft. - 1/4" HRS (minimum)
- PARTS FED (SIZE):** Input Shaft Blanks (0.63"Ø x 4.50" Lg.)
- FEED RATE:** 6 Parts/Minute
- MACHINE FED:** ACME-GRIDLEY 3/4" RA-8 Multi-Spindle Chucker