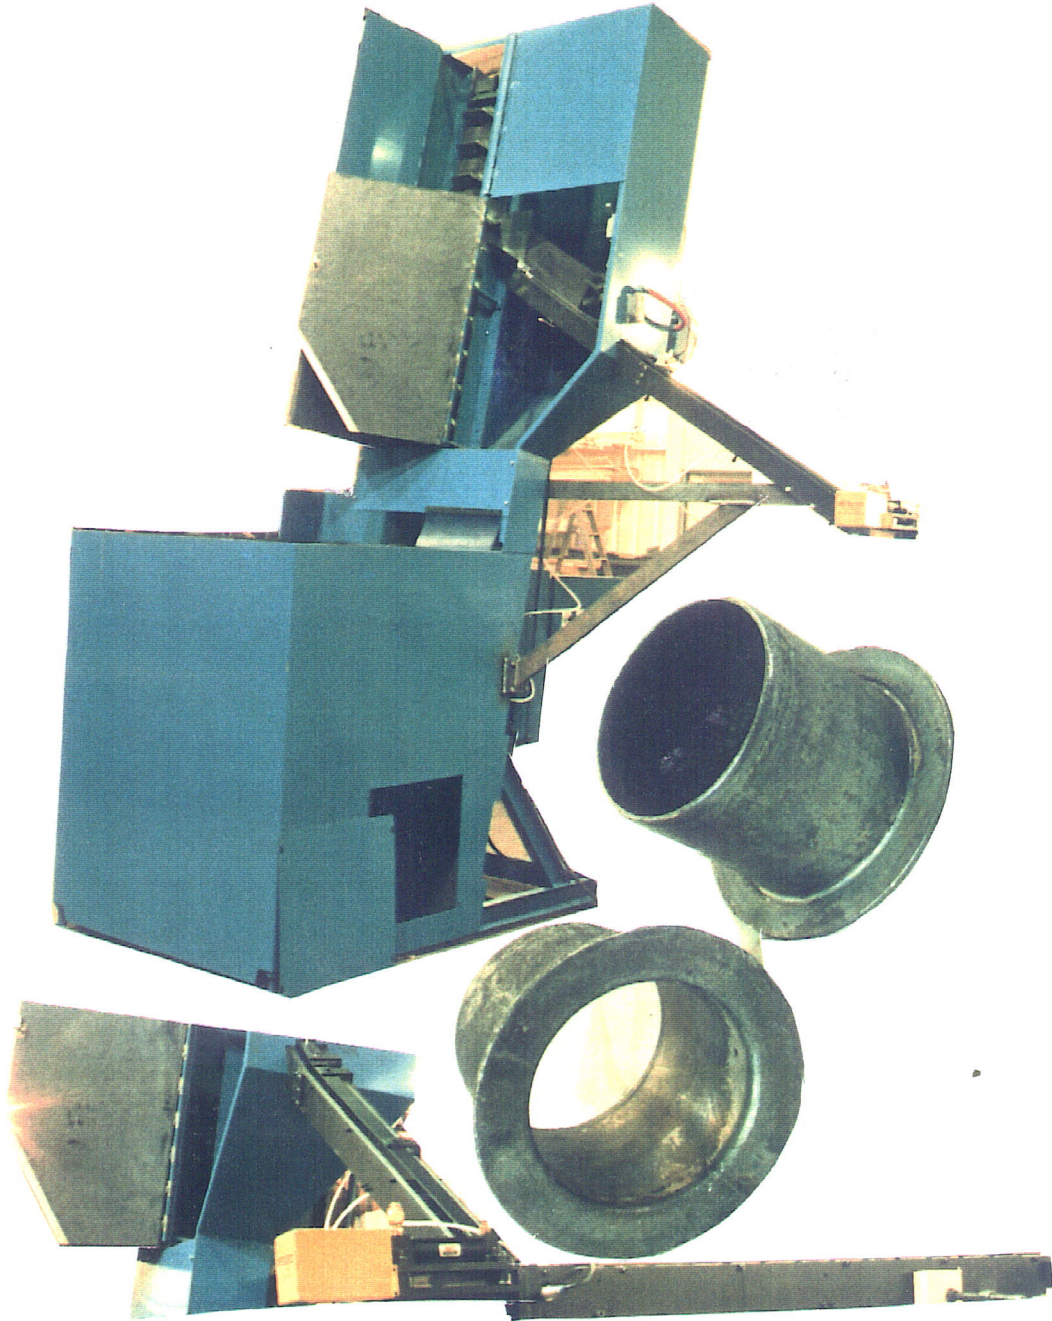


SN 13470 MODEL 2500 TERR. 12 2/96

**Feedall**  
*automation*

**FEED FROM A RANDOM LOADED FLOOR HOPPER, STEEL DEEP DRAWN BUSHINGS 2 1/2" DIA. THE BUSHINGS ARE ELEVATED FROM THE HOPPER AND ORIENTED HANGING BY THE FLANGE THEN FED TO A PUSHER DEVICE AND ADVANCED ONE AT A TIME IN TO A HORIZONTAL CHUTE DIA. TO DIA. TO THE PRESS LOAD STATION AT 67" ABOVE THE FLOOR AT A RATE OF 30 TO 50 PER. MIN.**

DWG. PD 9237-R2