


FEEDALL Model 2500-D Elevating Hopper Feeder

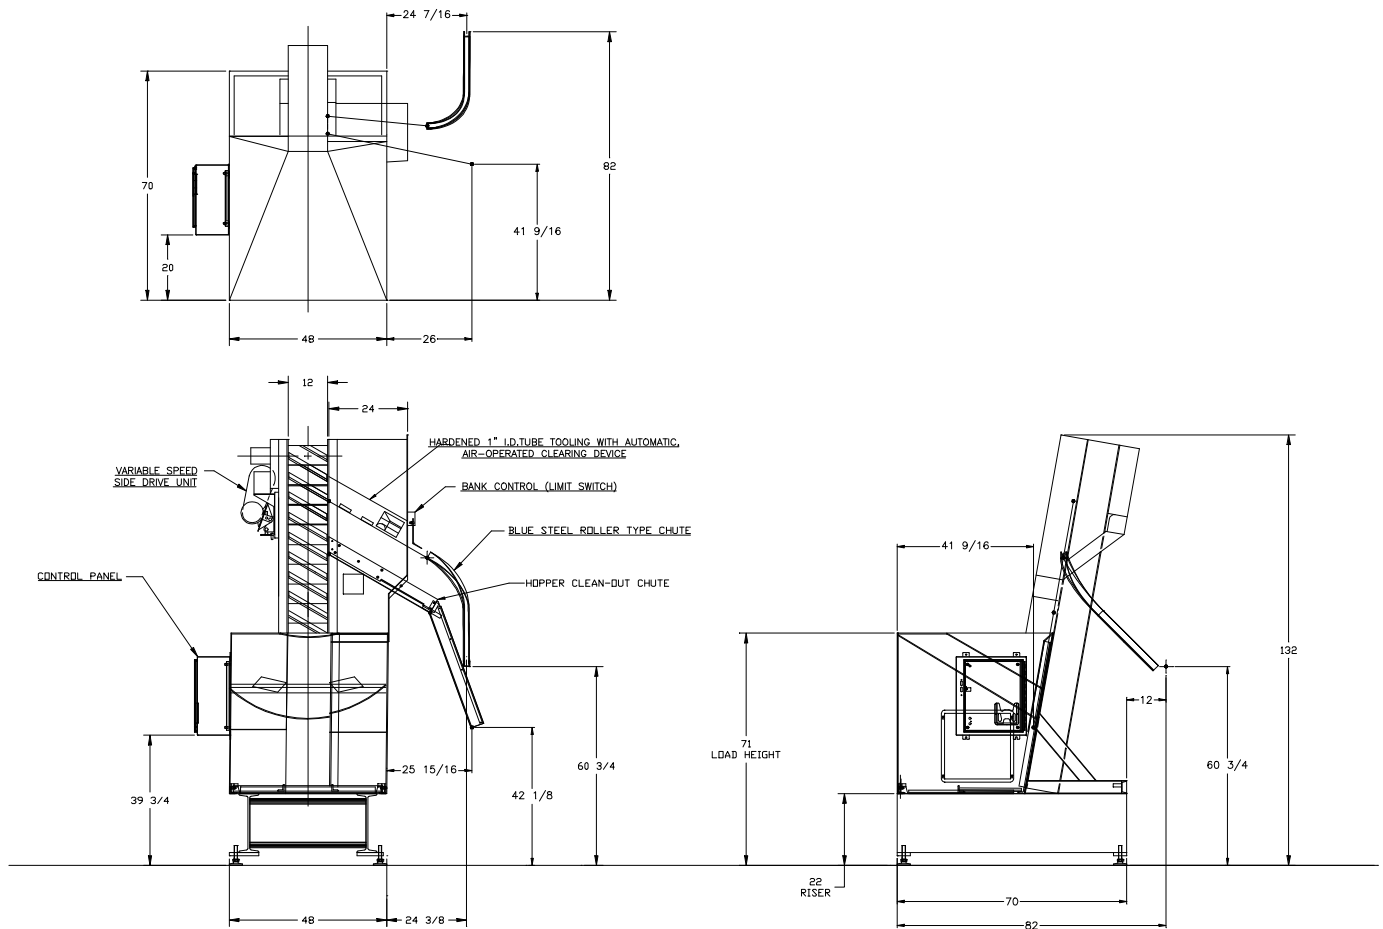

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The Differential Pinion Shafts will be elevated from the hopper via a cleated belt and discharged above the floor axis horizontal, or at a 30° angle.
- BELT WIDTH:** 12" Wide Elevating Belt
- DRIVE:** 3/4 HP/AC Motor
- PARTS FED (SIZE):** Differential Pinion Shafts (0.75"-1.00"Ø x 4.50"-5.00" Lg.)
- FEED RATE:** 35 Parts/Minute
- MACHINE FED:** Broach