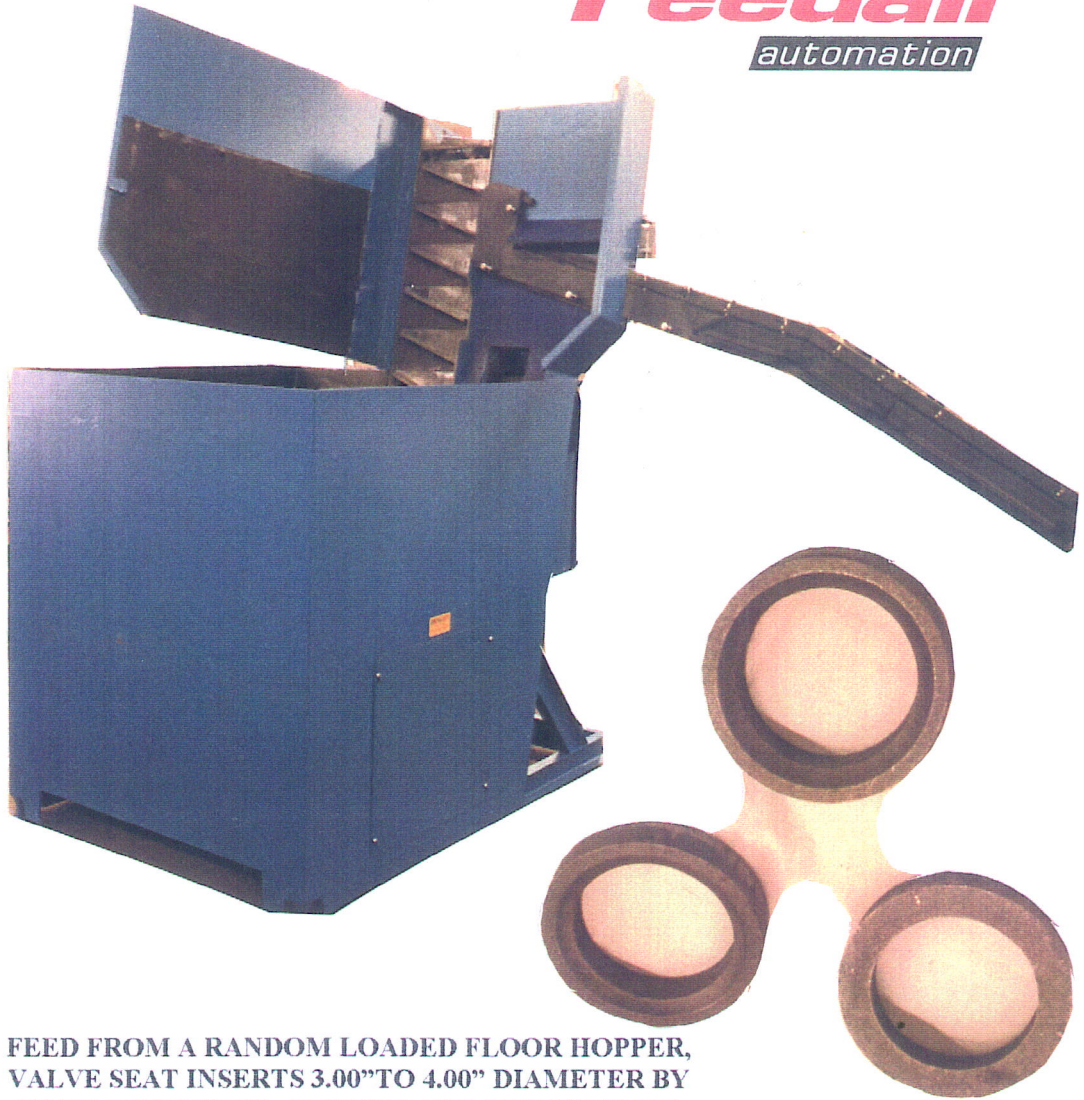


SN 13701 2500-C TERR. 4 7/96

Feedall
automation

FEED FROM A RANDOM LOADED FLOOR HOPPER,
VALVE SEAT INSERTS 3.00" TO 4.00" DIAMETER BY
.40" TO 1.25" THICK. INSERTS ARE ORIENTED DIA-
METER TO DIAMETER ROLLING IN A CONTINUOUS
STREAM THEN FED TO A FACE GRINDER AT 40"
ABOVE THE FLOOR AT A FEED RATE OF 1200 TO
2000 PARTS PER HOUR.

12" WIDE ELEVATOR BELT, 14 CUBIC FT. HOPPER
DRG. P-8526-R3