


## FEEDALL Model 2500-C Elevating Hopper Feeder

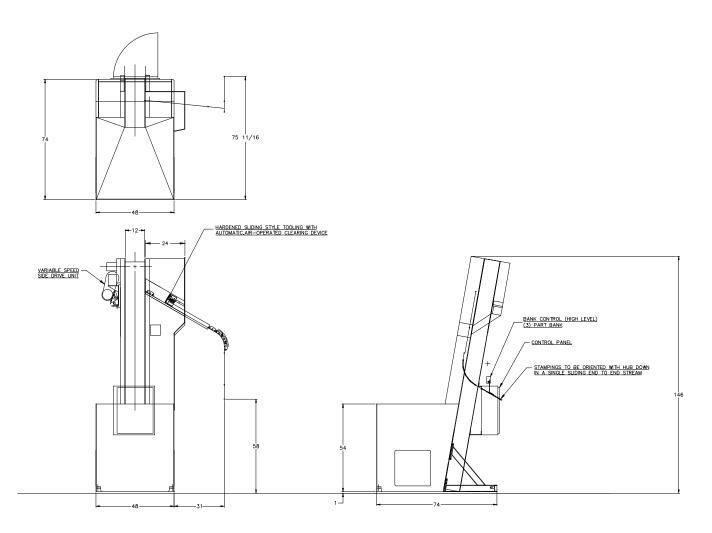

**APPLICATION:** Feed from a random loaded, floor mounted hopper. The Stampings will be elevated from the

hopper via a cleated belt and fed oriented in a continuous sliding stream.

**BELT WIDTH:** 12" Wide Elevating Belt

**DRIVE:** 3/4 HP/AC Motor

**PARTS FED (SIZE):** Stampings (Parts Matrix)

FEED RATE: 30 Parts/Minute

MACHINE FED: Thread Checker