


66

SN 10763 MODEL 2500 D TERR. 2 9/88

Feedall
automation

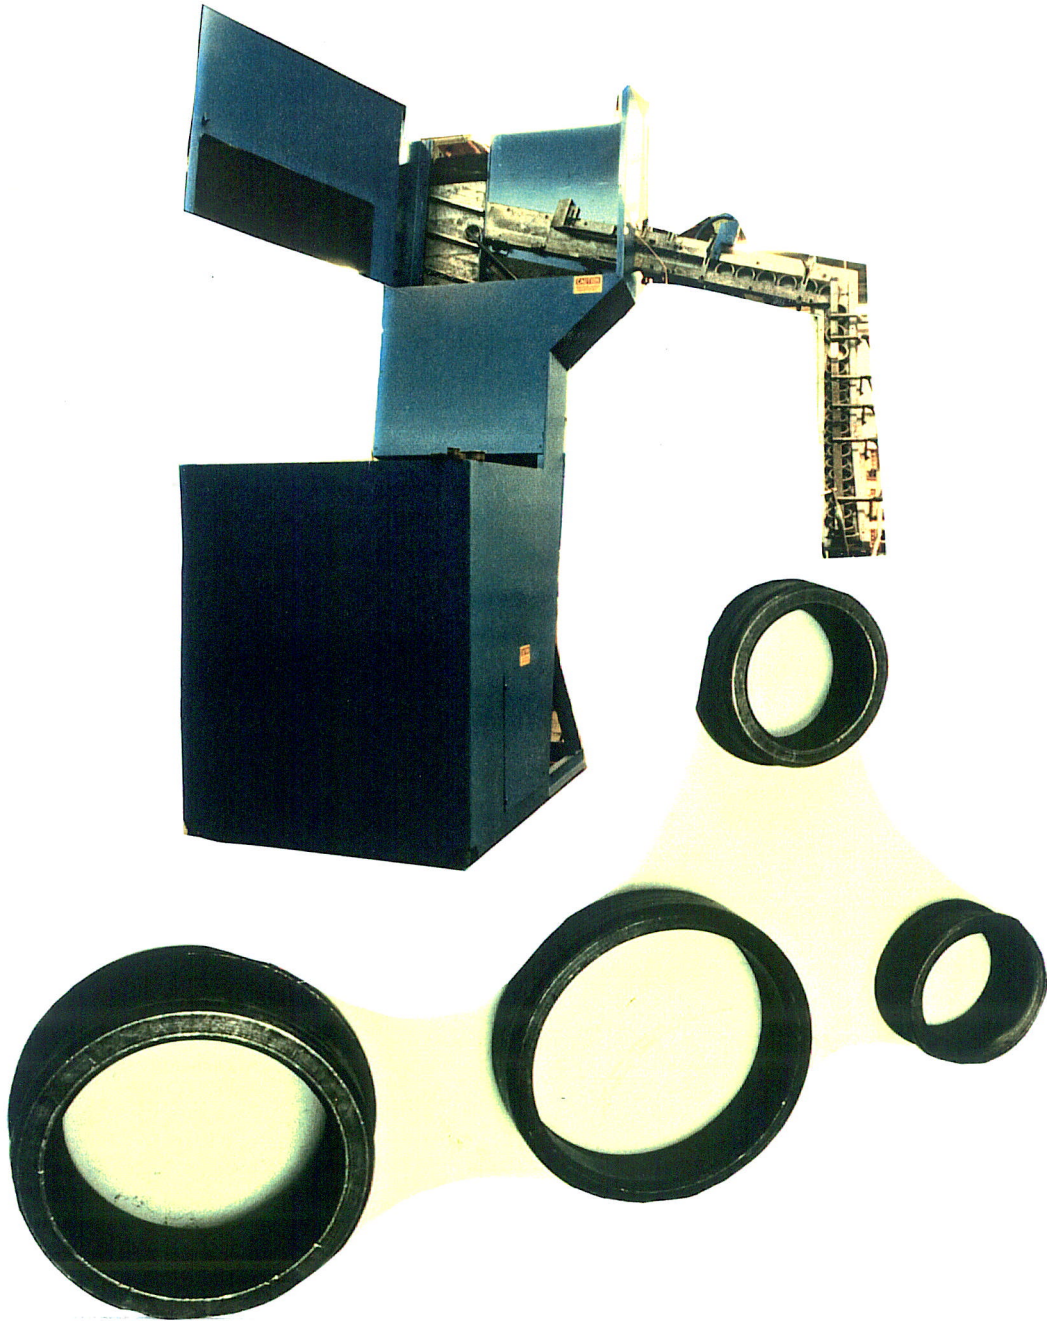

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,
INNER AND OUTER BEARING RACES 1.75 TO 5.0" DIA.X .57 TO
1.6" THICK. THE BEARINGS WILL BE ORIENTED DIAMETER TO
DIAMETER ROLLING IN A SINGLE STREAM THEN FED TO A
POSITION 48" ABOVE THE FLOOR LAYING FLAT AXIS
HORIZONTAL TO THE CUSTOMERS CONVEYOR AT A RATE OF
20 TO 30 PER. MIN.
12" WIDE ELEVATOR BELT, 20 CU. FT. HOPPER.
DWG. 7530