


42

SN 11078 MODEL 2500 D TERR. 1 & 8 9/89  
SN 11078 MODEL 2600 HD

**Feedall**  
automation

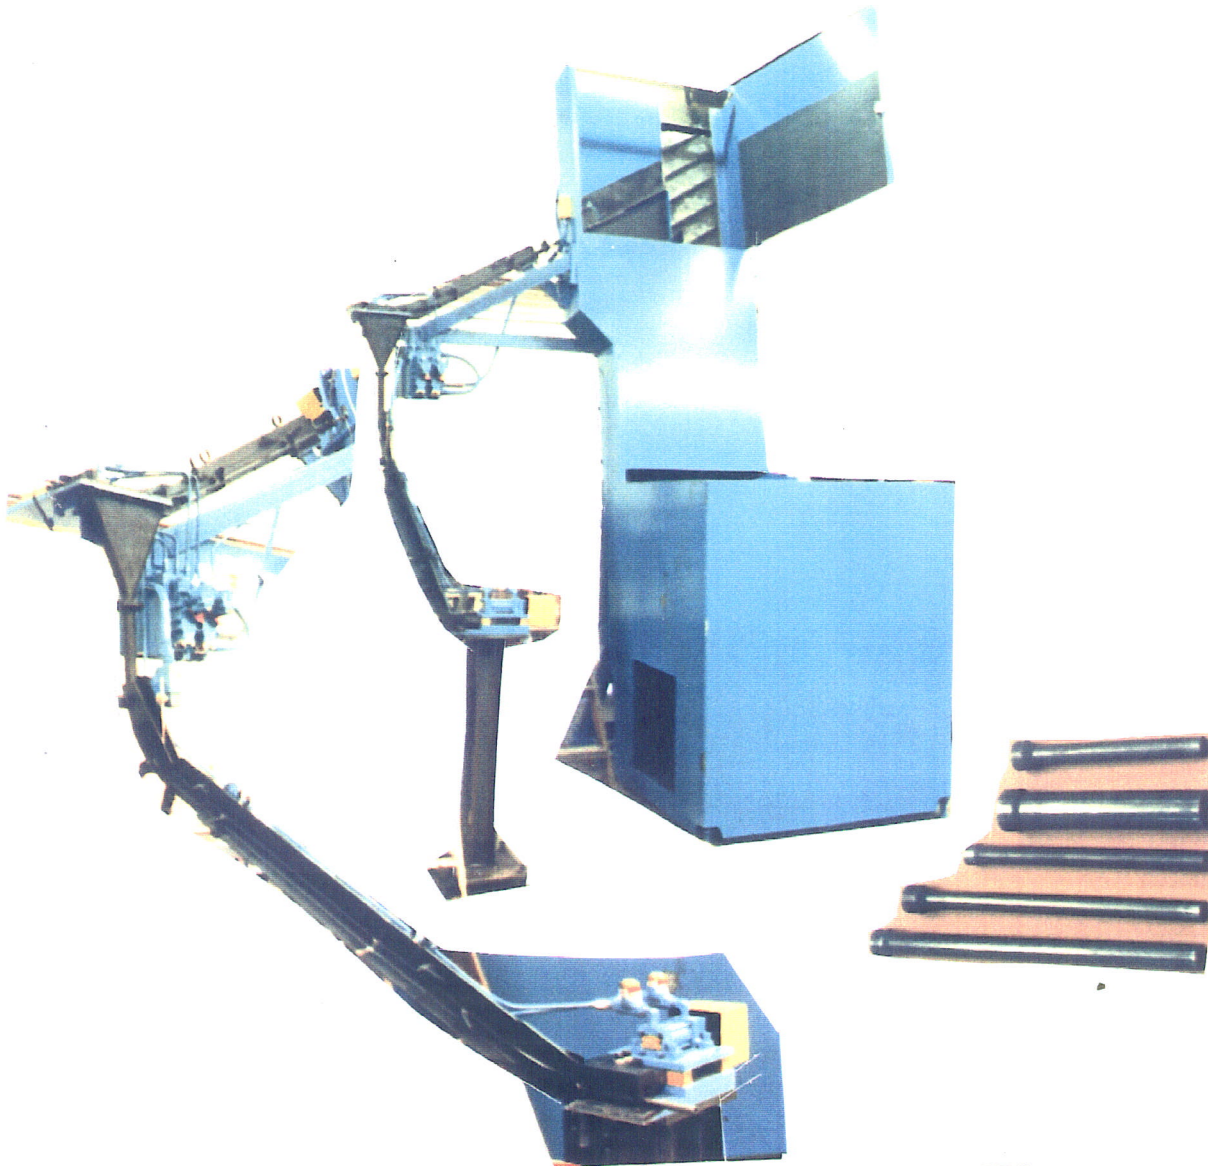

FEED FROM RANDOM LOADED FLOOR MOUNTED HOPPERS  
EXTRUDED METAL HYDRAULIC HOSE STEMS, .502 TO .972  
"DIA. X 4.252 TO 7.913" LG. ( MODEL 2500D) AND 1.500 TO 3.125"  
DIA. X 4.310 TO 12.70" LG. (MODEL 2600HD) THE HOSE STEMS  
WILL BE ORIENTED WITH SMALL DIA. STEM AND LEADING  
AND TRANSFERRED ONE AT A TIME, AXIS HORIZONTAL, TO A  
LOAD NEST AT 45" ABOVE THE FLOOR AT A FEED RATE OF  
150 TO 300 PER. HOUR.  
MODEL 2500D 12" WIDE ELEVATOR BELT, 20 CU. FT. HOPPER  
MODEL 2600HD 18" WIDE ELEVATOR BELT, 20 CU. FT. HOPPER  
DWG. PD 7794 2500  
DWG. PD 7795 2600