


16

SN 13009 MODEL 2500 D TERR. 8 2/95

Feedall
automation

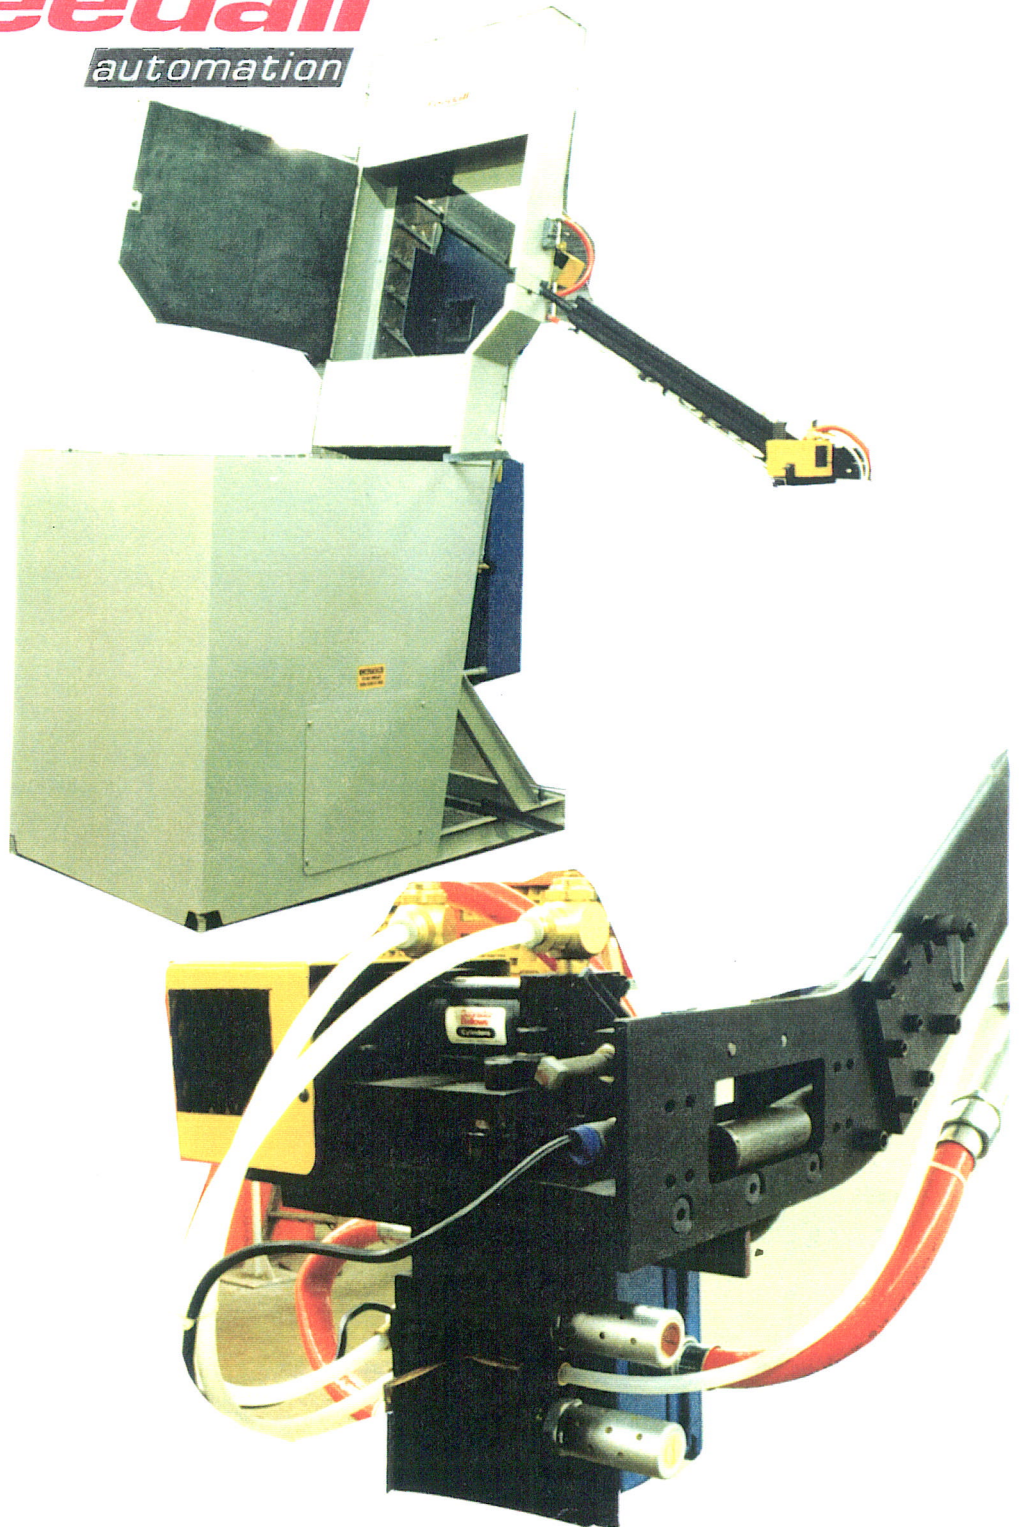

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER,
PISTON WRIST PINS .75 TO 1.50" DIA. X 2 TOP 4 LG. THE PINS
ARE TO BE ORIENTED AND FED IN A SINGLE ROLLING
DIAMETER TO DIAMETER STREAM TO THE INPUT OF THE
ECONOMY END FINISHER MAGAZINE AT A HEIGHT OF 59"
ABOVE THE FLOOR AT A FEED RATE OF 40 TO 60 PARTS PER
MIN.
12" WIDE ELEVATOR BELT, 20 CU. FT. HOPPER
DWG. P 8526 R