


## FEEDALL Model 2500-D Elevating Hopper Feeder

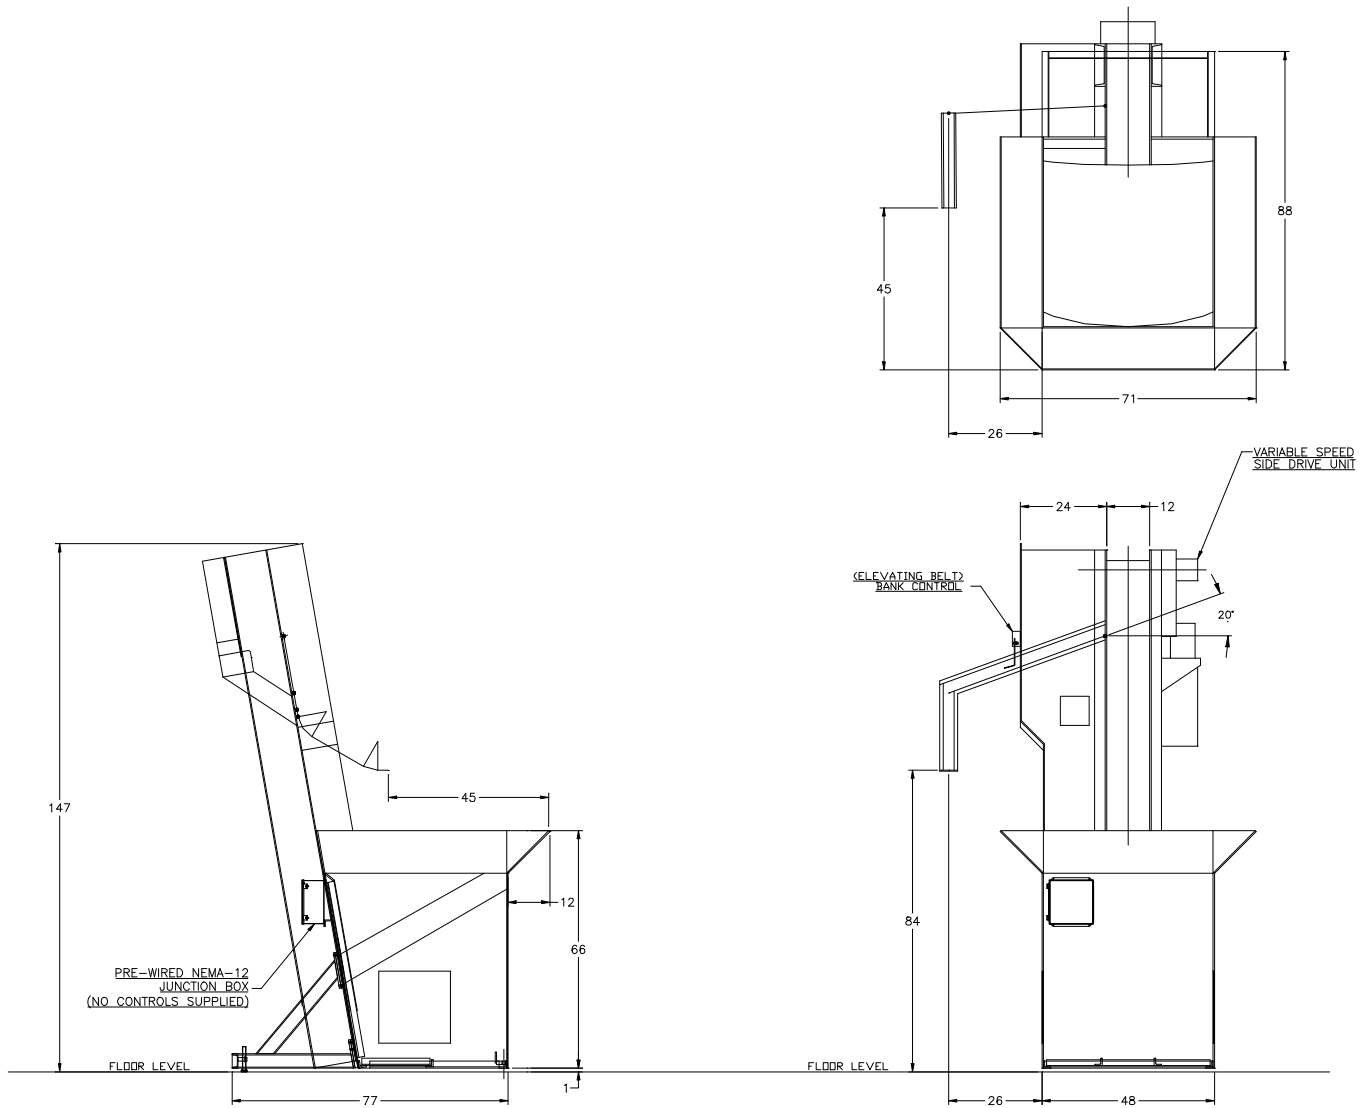

**APPLICATION:** Feed from a random loaded, floor mounted hopper. The Saw Cut Steel Slugs will be elevated from the hopper via a cleated belt and fed oriented in a continuous rolling stream and discharged to customer supplied conveyor.

**BELT WIDTH:** 12" Wide Elevating Belt

**DRIVE:** 1 HP/AC Motor

**PARTS FED (SIZE):** Saw-Cut Steel Slugs (2.375"-3.00"Ø x 0.88"-1.25" Lg.)

**FEED RATE:** 20 Parts/Minute

**MACHINE FED:** Induction Heater