


SN 13610 MODEL 2500-C TERR. 4 5/96

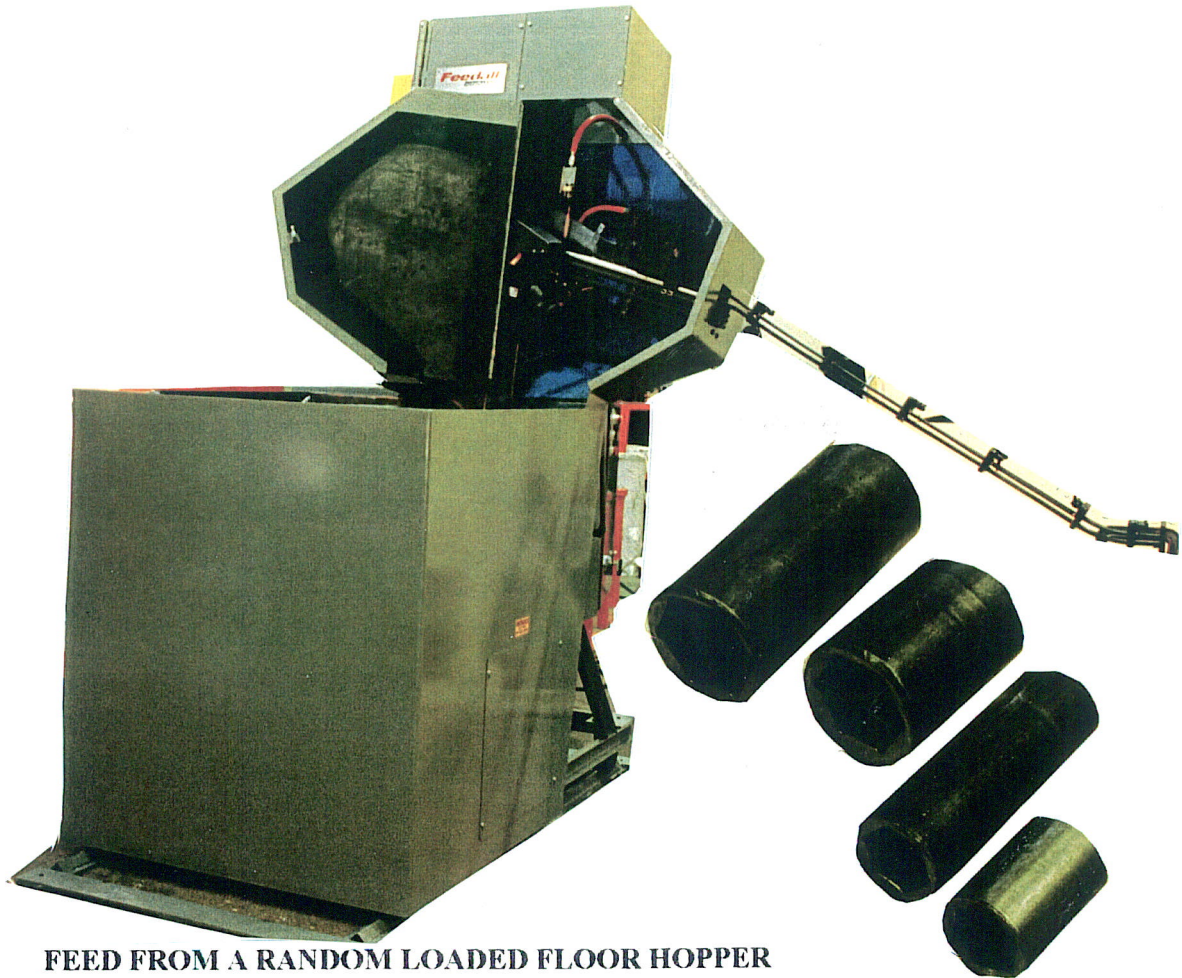

FEED FROM A RANDOM LOADED FLOOR HOPPER
SOCKET WRENCHES .750" TO 1.500" DIAMETER IN
VARIOUS LENGTHS. THE SOCKETS ARE ELEVATED
FROM THE HOPPER THEN DISCHARGED SLIDING
THROUGH A FEED ROLL WITH A CLEARING WHEEL
TO REMOVE ANY MISORIENTED SOCKETS . THE
SOCKETS WILL EXIT THE FEED ROLLS AND SLIDE
THROUGH AN ADJUSTABLE ROD TYPE CHUTE TO
A CENTERLESS GRINDER AT 42" ABOVE THE FLOOR
AT A FEED RATE OF 75 TO 200" PER. MIN. 12" WIDE
ELEVATOR BELT, 14 CUBIC FOOT HOPPER. DWG.

P-7095 R 2