


FEEDALL Model 2500-D Elevating Hopper Feeder

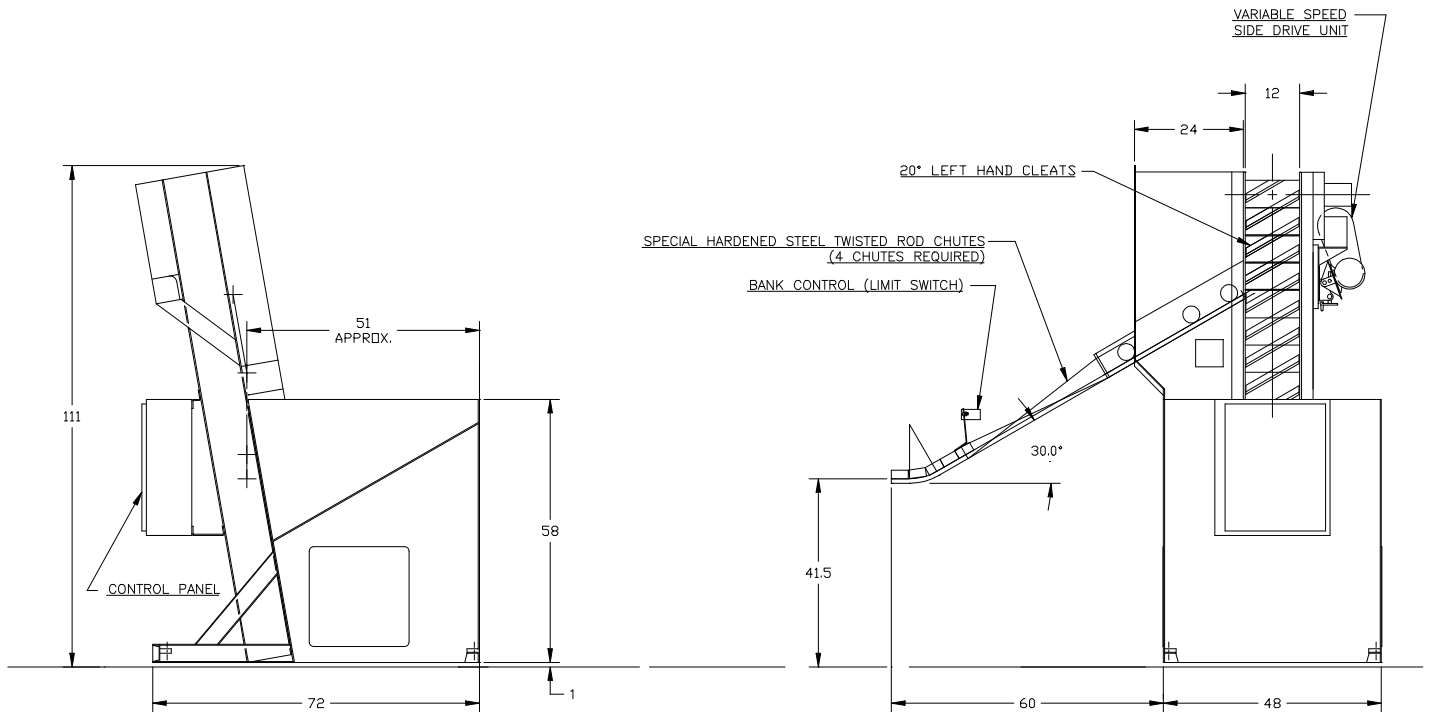

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The Slug Blinds will be elevated from the hopper via a cleated belt and fed oriented twisted flat rolling, discharged sliding diameter-to-diameter axis vertical to the floor.
- BELT WIDTH:** 12" Wide Elevating Belt
- DRIVE:** 3/4 HP/AC Motor
- PARTS FED (SIZE):** Steel Slugs (2.12"-3.75"Ø x 1.21"-1.91" Lg.)
- FEED RATE:** 2 Parts/Minute
- MACHINE FED:** Induction Heater