


## FEEDALL Model 2600-C Elevating Hopper Feeder

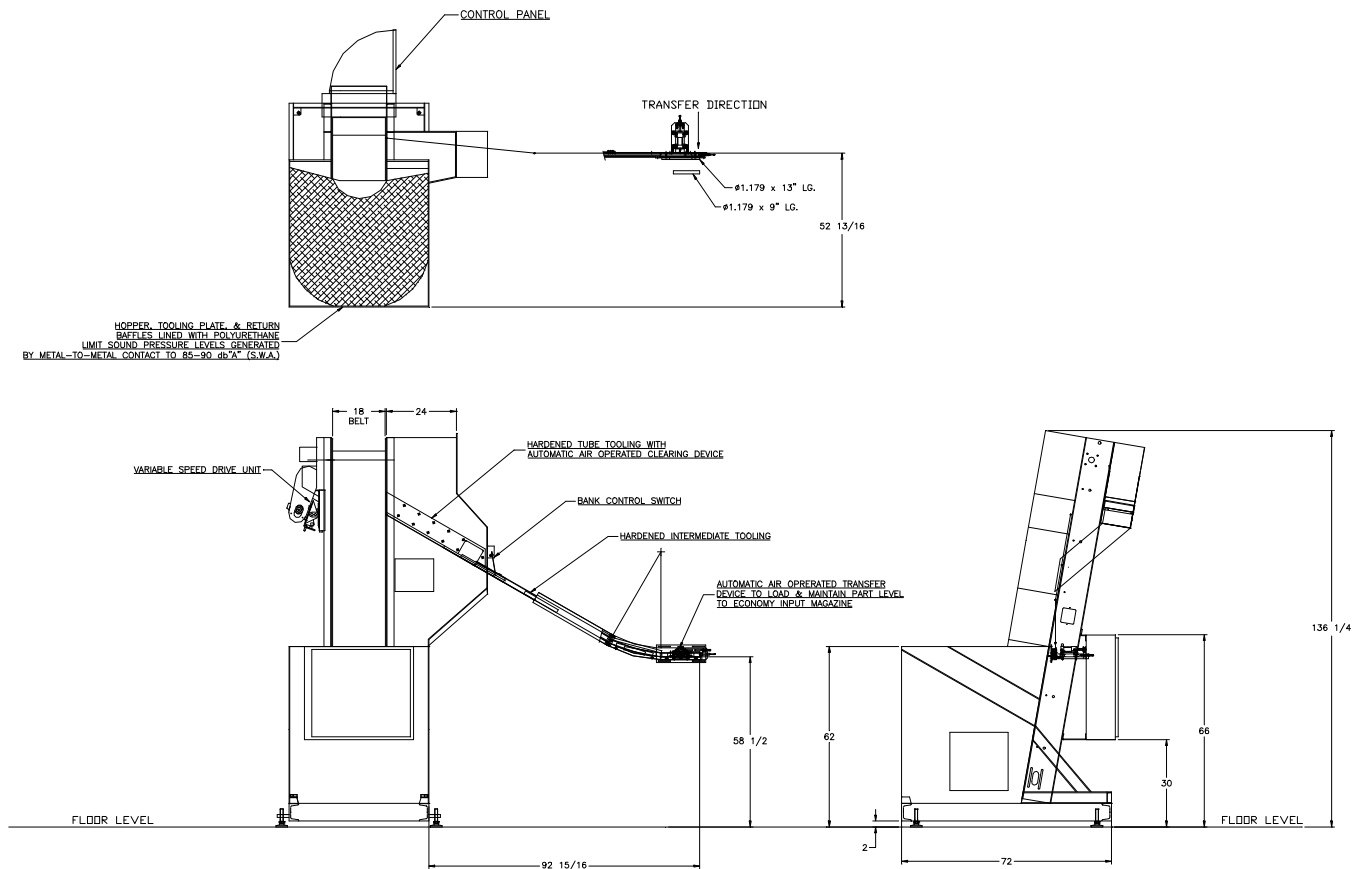

- APPLICATION:** Feed from a random loaded, floor mounted hopper. The Steel Tubes will be elevated from hopper via a cleated belt and discharged in a continuous end to end stream to a transfer device.
- BELT WIDTH:** 18" Wide Elevating Belt
- DRIVE:** 3/4 HP/AC Motor
- PARTS FED (SIZE):** Steel Tubes (1.179"Ø x 9.00"-13.00" Lg.)
- FEED RATE:** 20 Parts/Minute
- MACHINE FED:** ECONOMY Model 53-HYD-24 End Finisher