


## FEEDALL Model 3000 Elevating Hopper Feeder w/1650-1SC-72 Cross-Feed Conveyor

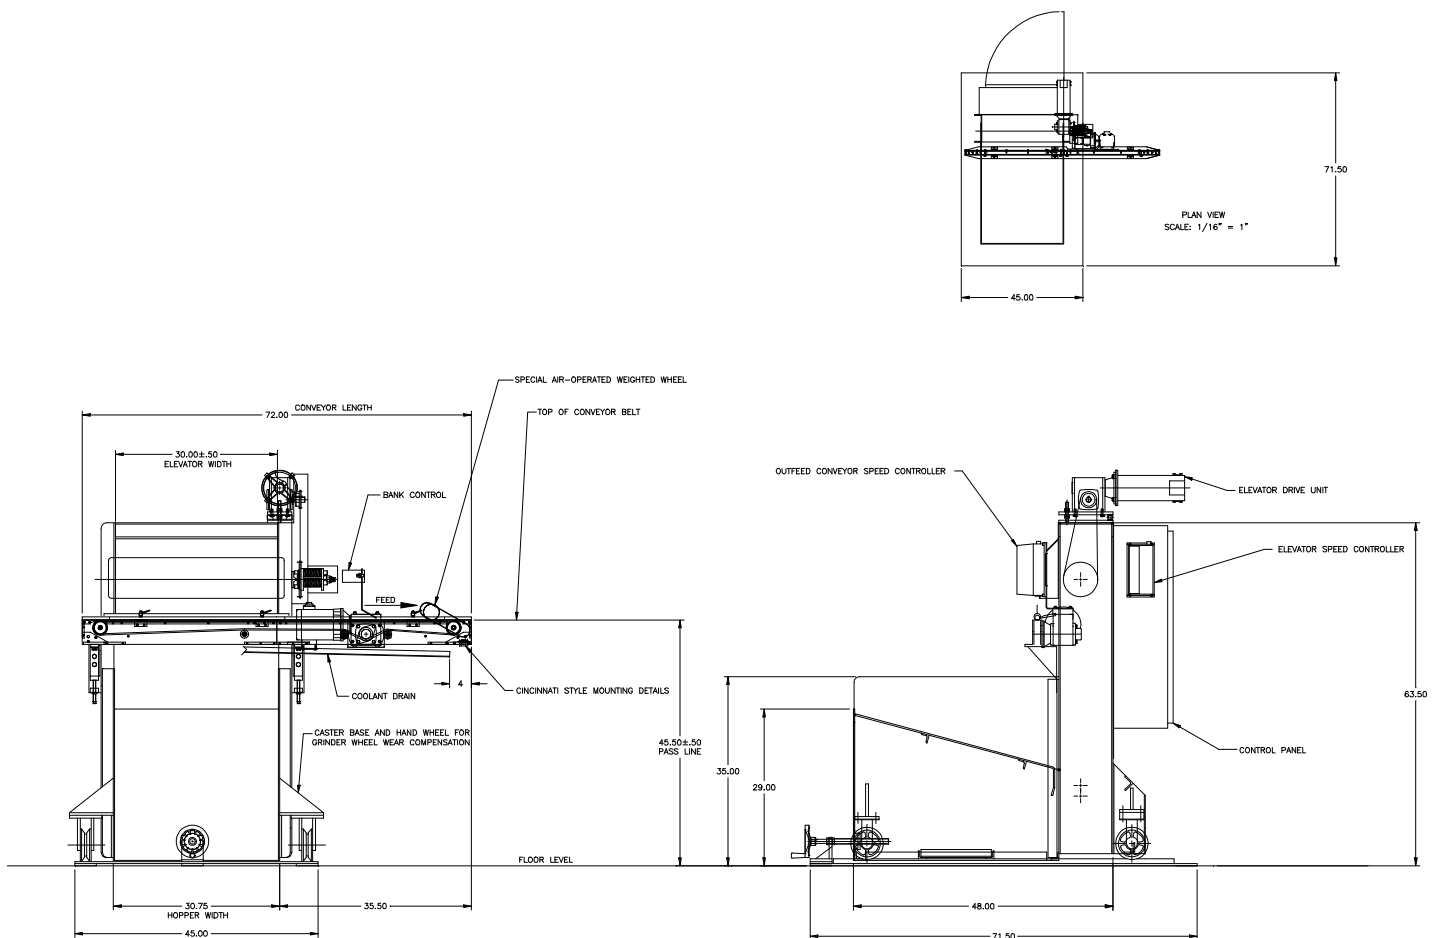

**APPLICATION:** Feed from a manually loaded floor mounted hopper, Steel Bars. The Bars will be elevated from the hopper via cleated belt and deposited onto a front mounted, Cross-Feed Conveyor. The Conveyor will translate the parts in a continuous, end-to-end stream to the workrest of a Centerless Grinder.

**ELEVATOR BELT:** 30" Wide Elevating Belt

**ELEVATOR DRIVE:** 3/4 HP/AC Motor w/Variable Frequency Controller and Overload Relief Clutch

**CONVEYOR DRIVE:** 1/4 HP/AC Motor w/Variable Frequency Controller

**PARTS FED (SIZE):** Steel Bars (0.50"-0.75"Ø x 10"-24" Lg.)

**FEED RATE:** 9-20 Parts/Minute

**MACHINE FED:** CINCINNATI Model 350-20 RK Centerless Grinder