


28

SN 12420 MODEL 3600 TERR. 8 12/93

Feedall
automation

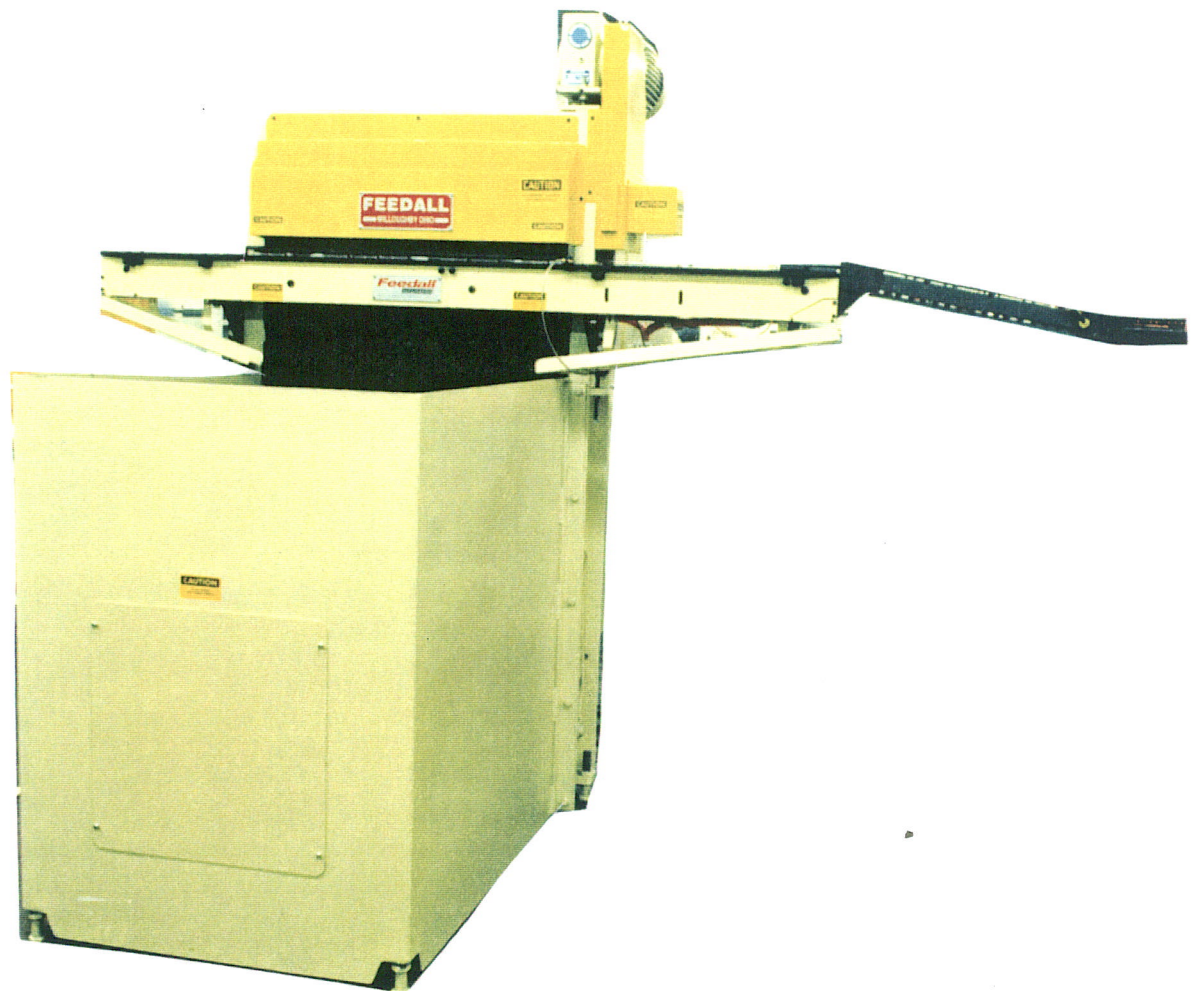

FEED FROM A RANDOM LOADED FLOOR MOUNTED HOPPER
AUTOMOTIVE PISTON PINS . 825 TO 1.054 "DIA.X 2.62 TO 3.44"
LG. THE PINS WILL BE ELEVATED FROM THE HOPPER THEN
DISCHARGED ROLLING TO THE FRONT CROSS CONVEYOR
THEN FED END TO END TO AN ECONOMY END FINISHER.
THE FEED RATE WAS 4500 PINS PER. HOUR.

NOTE: THIS SAME MACH WAS USED FOR FEEDING A
CENTERLESS GRINDER.

36" WIDE ELEVATOR, 20 CU. FT. HOPPER

DWG. P 8472 END FINISHER

DWG. P 8479 CENTERLESS GRINDER