



FEEDALL Model 4800-HD Elevating Hopper Feeder w/1650-80RC-102 Cross-Feed Conveyor

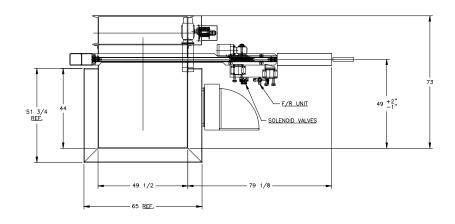

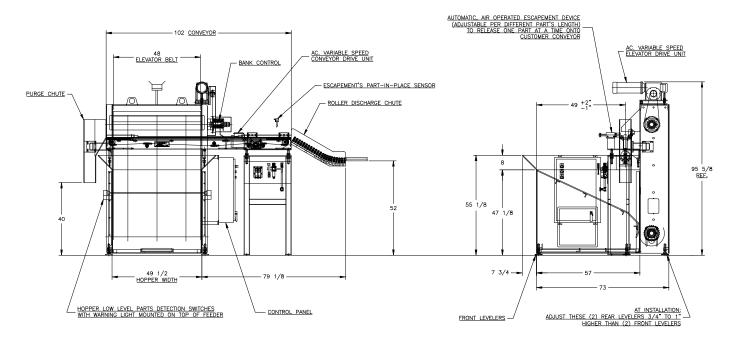

APPLICATION: Feed from a random loaded, floor mounted hopper. The Steel Billets will be elevated from the

hopper via cleated belt and deposited onto a cross-feed conveyor. The conveyor will transfer

the parts in a continuous stream onto customers input conveyor of a press.

BELT WIDTH: 48" Wide Elevating Belt

DRIVE: 1-1/2 HP/AC Motor

PARTS FED (SIZE): Steel Billets (2.00"-5.00"Ø x 4.00"-11.50" Lg.)

FEED RATE: 10 Parts/Minute

MACHINE FED: Induction Heater