


FEEDALL Model 4800-HD Elevating Hopper Feeder w/1650-80RC-96 Cross-Feed Conveyor, 6,000# Vibratory Metering Hopper & SD-60-70-7,000# Hydraulic Tub Dumper

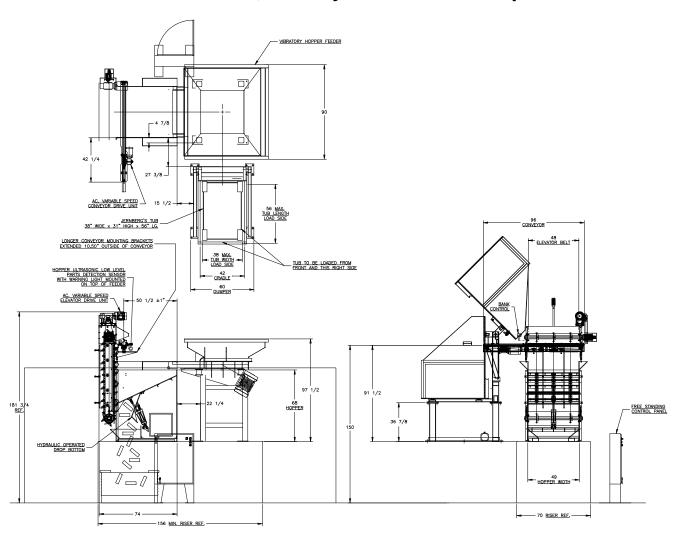

APPLICATION: Feed from a random loaded floor mounted hopper. The billets will be elevated from the

hopper via cleated belt and deposited onto a cross-feed conveyor. The conveyor will translate

the parts in a continuous stream onto a model 1650 conveyor.

BELT WIDTH: 48" Wide Elevating Belt

DRIVE: 3 HP/AC Motor

PARTS FED (SIZE): Steel Billets (Part Matrix)

FEED RATE: 10-15 Parts/Minute

MACHINE FED: Induction Heater