


FEEDALL Model 2500-D Elevating Hopper Feeder w/180° Roll-Over Dumper

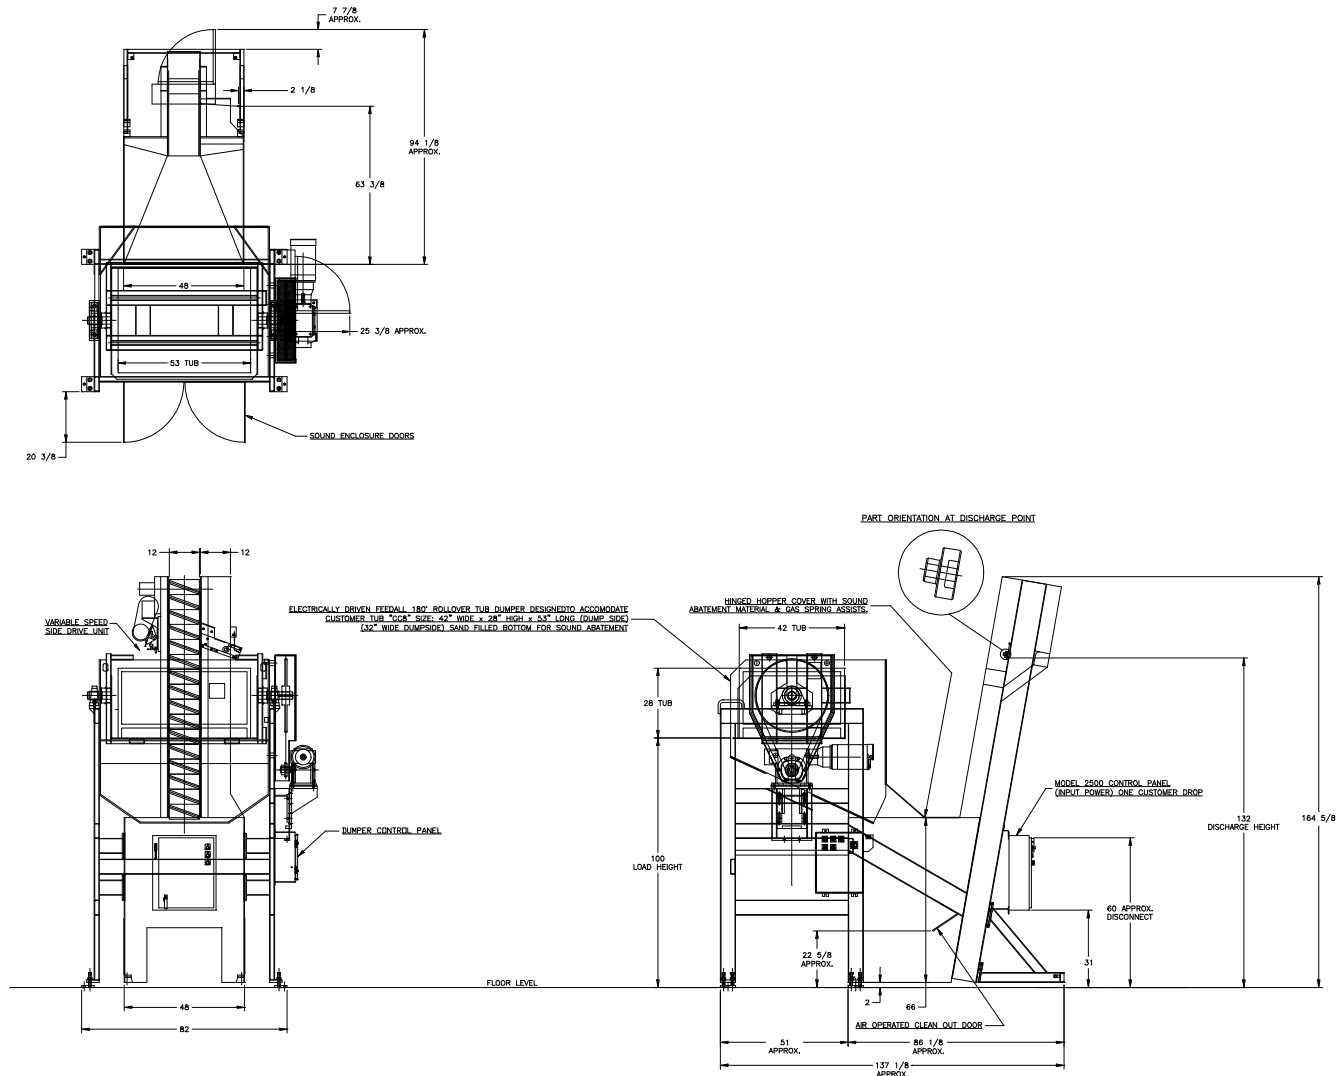

APPLICATION:	Feed from a random loaded, floor mounted hopper. The blanks will be elevated from the hopper via a cleated belt and fed oriented in a continuous rolling stream and discharged into existing blue steel chutes.
BELT WIDTH:	12" Wide Elevating Belt
DRIVE:	3/4 HP/AC Motor
PARTS FED (SIZE):	Rear Sun Gear Blanks (2.50"Ø x 1.63" Lg.)
FEED RATE:	12 Parts/Minute
MACHINE FED:	Machining Center