
Feedall automation

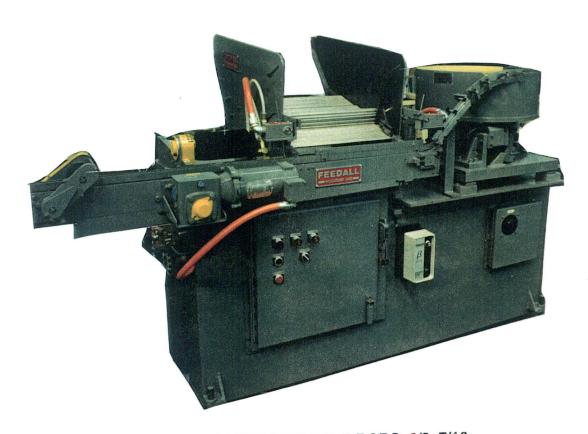

FEED FROM A MANUALLY LOADED MAGAZINE RODS, 3/8, 7/16, 1/2, 5/8, AND 3/4" DIA. X 3 1/2 TO 12" LG. IN A FEEDER BOWL RODS, SAME DIAS. X 1 TO 3 1/4" LG. RODS WILL BE FED TO THE FRONT MOUNTED CROSS CONVEYOR THEN CONVEYED END TO END TO A CENTERLESS GRINDER AT 42" ABOVE THE FLOOR AT A RATE OF 120" PER. MIN. DWG. P 7636